



LJMU Research Online

Al-attabi, A, Hashim, KS, Jafer, HM and Alzeyadi, A

Removal of Nitrogen Compounds from Industrial Wastewater Using Sequencing Batch Reactor: The Effects of React Time

<http://researchonline.ljmu.ac.uk/6202/>

Article

Citation (please note it is advisable to refer to the publisher's version if you intend to cite from this work)

Al-attabi, A, Hashim, KS, Jafer, HM and Alzeyadi, A (2016) Removal of Nitrogen Compounds from Industrial Wastewater Using Sequencing Batch Reactor: The Effects of React Time. International Journal of Chemical, Molecular, Nuclear, Materials and Metallurgical Engineering. 10 (7).

LJMU has developed **LJMU Research Online** for users to access the research output of the University more effectively. Copyright © and Moral Rights for the papers on this site are retained by the individual authors and/or other copyright owners. Users may download and/or print one copy of any article(s) in LJMU Research Online to facilitate their private study or for non-commercial research. You may not engage in further distribution of the material or use it for any profit-making activities or any commercial gain.

The version presented here may differ from the published version or from the version of the record. Please see the repository URL above for details on accessing the published version and note that access may require a subscription.

For more information please contact researchonline@ljmu.ac.uk

<http://researchonline.ljmu.ac.uk/>

Removal of Nitrogen Compounds from Industrial Wastewater Using Sequencing Batch Reactor: The Effects of React Time

Ali W. Alattabi, Khalid S. Hashim, Hassnen M. Jafer, Ali Alzeyadi

Abstract—This study was performed to optimise the react time (RT) and study its effects on the removal rates of nitrogen compounds in a sequencing batch reactor (SBR) treating synthetic industrial wastewater. The results showed that increasing the RT from 4 h to 10, 16 and 22 h significantly improved the nitrogen compounds' removal efficiency, it was increased from 69.5% to 95%, 75.7 to 97% and from 54.2 to 80.1% for $\text{NH}_3\text{-N}$, $\text{NO}_3\text{-N}$ and $\text{NO}_2\text{-N}$ respectively. The results obtained from this study showed that the RT of 22 h was the optimum for nitrogen compounds removal efficiency.

Keywords—Ammonia-nitrogen, retention time, nitrate, nitrite, sequencing batch reactor, sludge characteristics.

I. INTRODUCTION

INDUSTRIAL wastewater could be indicated by high concentrations of biochemical oxygen demand (BOD), chemical oxygen demand (COD), fluctuating pH and many other toxic compounds [1]. To remove these toxic compounds from wastewaters, researchers have been using processes such as adsorption, solvent extraction, chemical oxidation, and biological treatment [2]–[4]. Though conventional biological nitrogen removal in activated sludge system has been widely practiced for its economic and technological feasibility, it has some technical constrains, such as sludge bulking, large footprint of treatment plant, easy washout of nitrifying bacteria, high production of excess sludge [5].

Activated sludge process (ASP) is difficult to maintain, costly and requires large areas [1]. One of the alternatives of ASP is the SBR. SBR operates periodically in a cycle of fill and draw. One of the main advantages of using SBR for industrial wastewaters treatment is the ability to handle periodic flows. In addition, SBR can handle the change of the environmental conditions inside the reactor in a controlled manner, as a result of that it could accelerate the enrichment of microorganisms having specific degradation efficiency. Moreover, SBR

Ali. W. Alattabi is PhD student in the School of The Built Environment, Liverpool John Moores University, UK. He is, as well, with the Department of Civil Engineering, Faculty of Engineering, University of Wasit, Iraq. (corresponding author; phone: 0044-7466448764; e-mail: aliwaheid@gmail.com).

Khalid S. Hashim is PhD student in the School of The Built Environment, Liverpool John Moores University, UK. He is, as well, with the Department of Civil Engineering, Faculty of Engineering, University of Babylon, Iraq.

Hassnen Mosa Jafer is PhD student in the School of The Built Environment, Liverpool John Moores University, UK. He is, as well, with the Department of Civil Engineering, Faculty of Engineering, University of Babylon, Iraq (e-mail: H.M.Jafer@2014.ljmu.ac.uk).

Ali Alzeyadi is with School of The Built Environment, Liverpool John Moores University, UK. (e-mail: a.t.alzeyadi@2013.ljmu.ac.uk).

requires less operating costs. Moreover, SBR requires less operating costs. (SBR) has distinct advantages of space-saving, flexible operational mode, and auto-control capability [6], [7].

RT is considered as one of the most controllable operation parameters of SBR; it could contribute to different treatment performance and biomass characteristics [8]. The RT is the time needed for microorganisms to biodegrade the organic and inorganic compounds of wastewater. There is a lack of researches on the relationship between the RT and nitrogen compounds removal efficiency.

The present study was conducted to investigate the effects of the RT on the removal efficiency of nitrogen compounds in a SBR.

II. MATERIALS AND METHODS

A. Bacteria Source and Synthetic Wastewater

The bacteria (biomass) are mixed culture of sewage activated sludge, it was brought from Liverpool Wastewater Treatment Works, Sandon Docks, Liverpool, UK. The influent synthetic wastewater was prepared in deionized water containing: 500 mg glucose/L; 200 mg $\text{NaHCO}_3\text{/L}$; 25 mg $\text{NH}_4\text{Cl/L}$; 25 mg $\text{KNO}_3\text{/L}$; 5 mg $\text{KH}_2\text{PO}_4\text{/L}$; 5 mg $\text{MgSO}_4\cdot 7\text{H}_2\text{O/L}$; 1.5 mg $\text{FeCl}_3\cdot 6\text{H}_2\text{O/L}$; 0.15 mg $\text{CaCl}_2\cdot 2\text{H}_2\text{O/L}$ [9], [10]. All reagents used in this study were purchased from Sigma-Aldrich, UK.

B. Setup and Operation of Laboratory SBR System

In this research, four identical reactors are used in the SBR system, R1, R2, R3 and R4. Each has a 5 L capacity. All of the reactors were filled with 3-4 L of synthetic wastewater, and 1-2 L of bacteria (biomass) for biological wastewater treatment. The treatment reactors were equipped with four electronic sensors (probes) to measure the parameters of pH, dissolved oxygen (DO), temperature and oxidation-reduction potential (ORP). The configuration of one of the four SBR reactors used in this research is shown in Fig. 1. The SBR reactors (R1, R2, R3 and R4) were operated with RT of (4, 10, 16 and 22 h), and the samples were taken and analysed from each reactor for influent and effluent respectively.

C. Analytical Methods

In this study, the analysis of influent and effluent samples of the SBR reactors was carried out after withdrawing and filtering the samples through 0.45 μm filter paper. The

concentrations of $\text{NH}_3\text{-N}$, $\text{NO}_3\text{-N}$ and $\text{NO}_2\text{-N}$ were measured according to the standard methods [11].

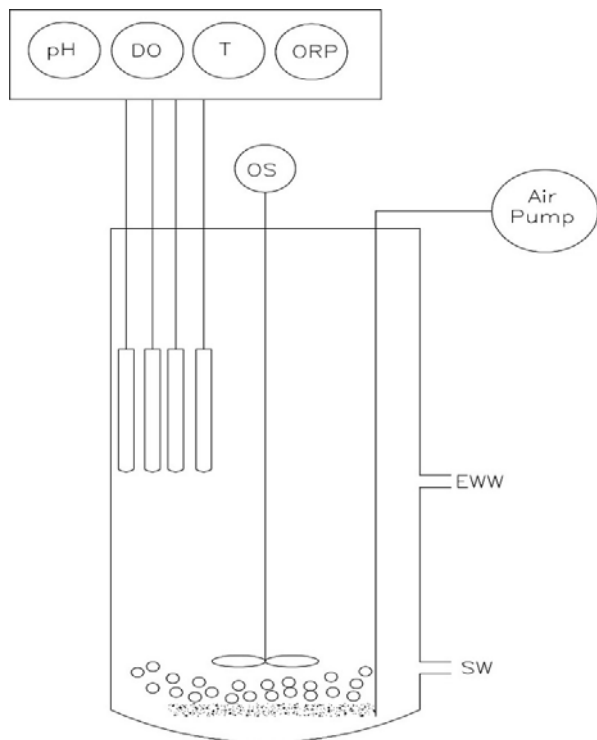


Fig. 1 The configuration of R1, one of the identical laboratory SBRs (R1, R2, R3 and R4) [DO: dissolved oxygen, T: temperature, ORP: oxidation reduction potential, OS: overhead stirrer, EWW: effluent wastewater, SW: sludge waste]

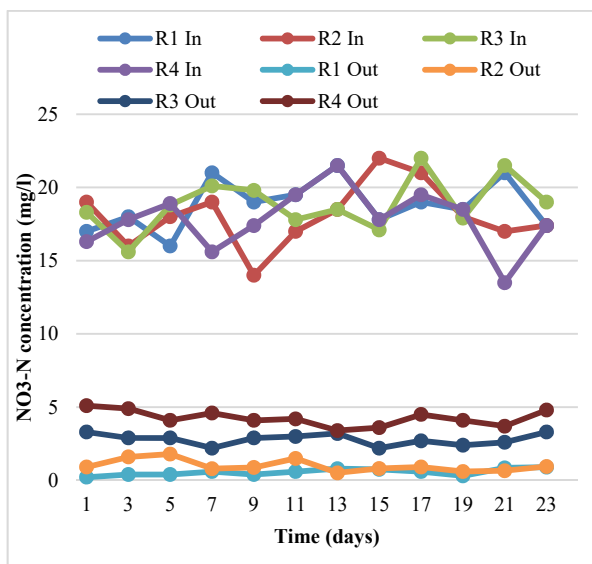


Fig. 2 The influent and effluent concentration of $\text{NH}_3\text{-N}$

III. RESULTS AND DISCUSSION

A. Effect of RT on Nitrogen Compounds Removal

The influent and effluent of $\text{NO}_3\text{-N}$, $\text{NH}_3\text{-N}$ and $\text{NO}_2\text{-N}$ are shown in Figs. 2-4. The effect of RT on $\text{NH}_3\text{-N}$, $\text{NO}_3\text{-N}$ and

$\text{NO}_2\text{-N}$ removal is shown in Figs. 5-7. The results showed that increasing the RT from 4 h to 10, 16 and 22 h significantly improved the nitrogen compounds removal efficiency, it was increased from 69.5% to 95%, 75.7 to 97% and from 54.2 to 80.1% for $\text{NH}_3\text{-N}$, $\text{NO}_3\text{-N}$ and $\text{NO}_2\text{-N}$ respectively. This is agreed with [13], they achieved up to 89%, 96% and 92.5% removal efficiency for COD, $\text{NH}_3\text{-N}$ and $\text{NO}_3\text{-N}$ respectively at the end of 24 h HRT. This is due the fact that higher HRT gives a longer contact time between biomass in the reactor and the wastewater, and thus better degradation rates [12].

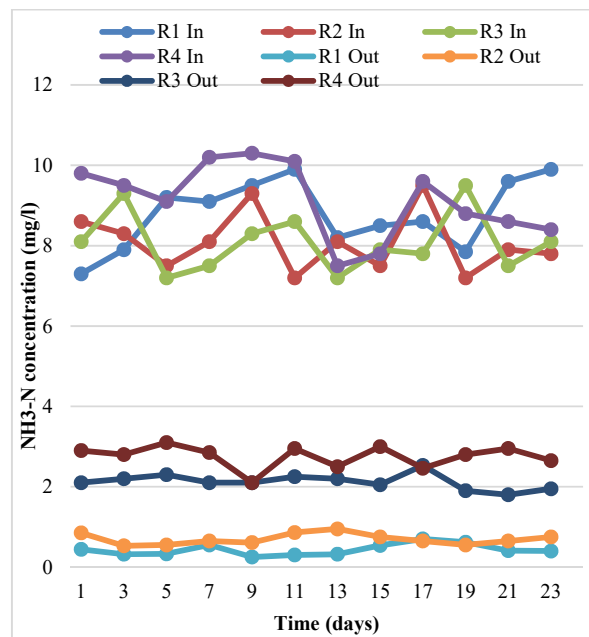


Fig. 3 The influent and effluent concentration of $\text{NO}_3\text{-N}$

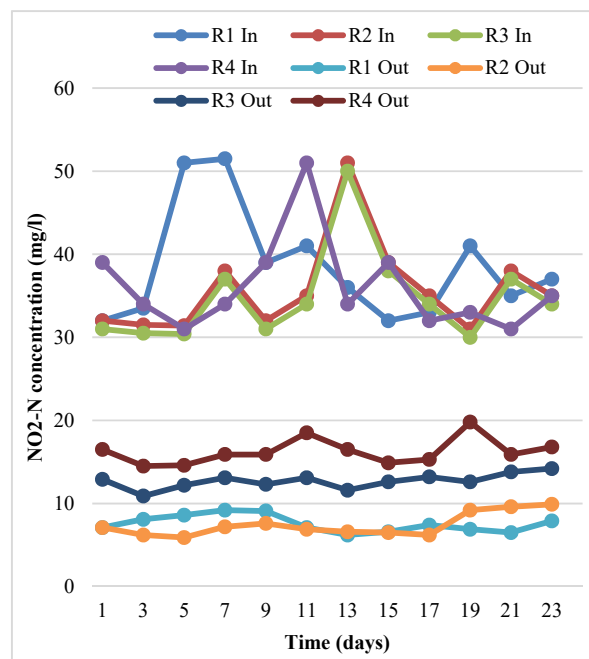


Fig. 4 The influent and effluent concentration of $\text{NO}_2\text{-N}$

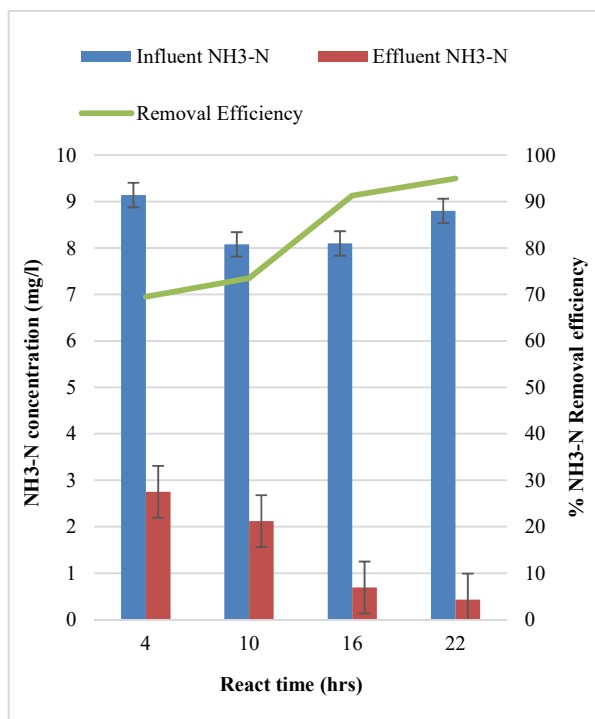


Fig. 5 The effect of RT on NH₃-N removal

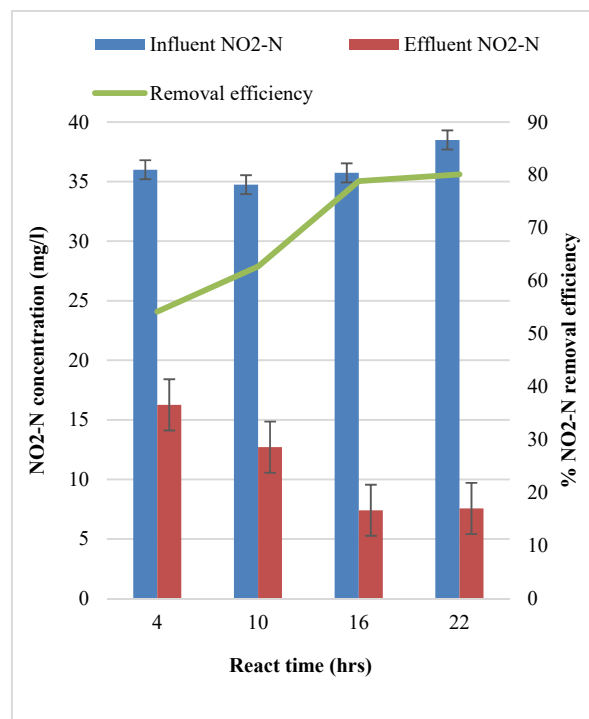


Fig. 7 The effect of RT on NO₂-N removal

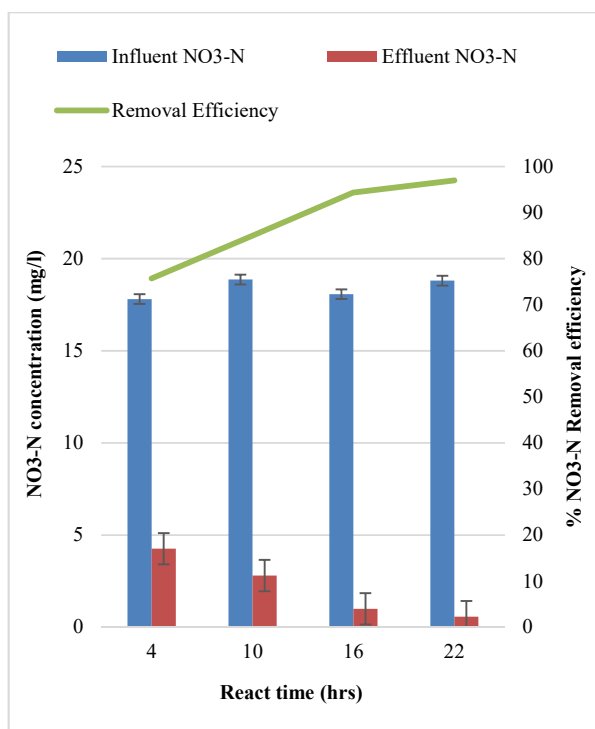


Fig. 6 The effect of RT on NO₃-N removal

IV. CONCLUSION

RT is one of the most significant SBR's operation parameters, which could affect the treatment efficiency. In this study, an experiment was carried out to optimise the RT and relate it to the removal efficiency of NH₃-N, NO₃-N and NO₂-N. The optimum RT obtained from this study 22 h it can reduce NH₃-N, NO₃-N and NO₂-N levels up to 95%, 97% and 80.1% respectively. For future study, 36 h and 10 h RT should be considered to find the best RT for nutrient removal.

ACKNOWLEDGMENT

The financial support from the Ministry of Higher Education and Scientific Research, Iraq, and University of Wasit for the first author is highly appreciated.

REFERENCES

- [1] Patil, P. G., Kulkarni, G. S., Kore, S. S. V. & Kore, S. V. S., Aerobic sequencing batch reactor for wastewater treatment: A review. *International Journal of Engineering research & technology*, 2, 2278–0181, 2013.
- [2] Wang, Y. T., Effect of chemical oxidation on anaerobic biodegradation of model phenolic compounds. *Water Environ Res.*, 64, 268–273, 1992.
- [3] Babu, K. S., Ajith kumar, P. V. & Kunhi, A. A. M., Mineralization of phenol and its derivatives by *Pseudomonas* sp. strain CP4. *World J Microbiol Biotechnol.*, 11, 661–664, 1995.
- [4] Fang, H. H. P., Chen, T., Li, Y.Y. & Chui, H. K., Degradation of phenol in wastewater in an upflow anaerobic sludge blanket reactor. *Water Res.*, 30, 1353–1360, 1996.
- [5] Tchobanoglous, G., Burton, F. L. & Stensel, H. D., *Wastewater Engineering: Treatment and Reuse*. McGraw Hill, New York, 4th edn., 2003.
- [6] Suthaker, S., Polprasert, C. & Droste, R. L., Sequencing batch anaerobic reactors for the treatment of a high strength organic wastewater. *Water Sci Technol.*, 23, 1249–57, 1991.

- [7] Yoong, E.T. & Lant, P.A., Biodegradation of high strength phenolic wastewater using SBR. *Water Sci Technol.*, 43, 299–306, 2001.
- [8] Huang, Z., Ong, S. L. & Ng, H. Y., Submerged anaerobic membrane bioreactor for low-strength wastewater treatment: Effect of HRT and SRT on treatment performance and membrane fouling. *Water Research.*, 45, 705–713, 2011.
- [9] Shariati, S. R., Bonakdarpour, B., Zare, N. & Ashtiani, F. Z., The effect of hydraulic retention time on the performance and fouling characteristics of membrane sequencing batch reactors used for the treatment of synthetic petroleum refinery wastewater. *Bioresour Technol.*, 102, 7692–7699, 2011.
- [10] Zhao, D., Liu, C., Zhang, Y. & Liu, Q., Biodegradation of nitrobenzene by aerobic granular sludge in a sequencing batch reactor (SBR). *Desalination.*, 281, 17–22, 2011.
- [11] American Public Health Association (APHA), *Standard methods for the examination of water and wastewater*, 18th ed., Washington, DC, USA: APHA, 2012.
- [12] Thakur, C., Mall, I. D. & Srivastava, V. C., Effect of Hydraulic Retention Time and Filling Time on Simultaneous Biodegradation of Phenol, Resorcinol and Catechol in a Sequencing Batch Reactor. *Archives of Environmental Protection.*, 39, 69-80 2013.
- [13] Hasan, H. A., Abdullah, S. R. S., Al-Attabi, A. W. N., Nash, D. A. H., Anuar, N., Rahman, N. A. & Titah, H. S., Removal of ibuprofen, ketoprofen, COD and nitrogen compounds from pharmaceutical wastewater using aerobic suspension-sequencing batch reactor (ASSBR). *Separation and Purification Technology.*, 157, 215–221, 2016.