



## LJMU Research Online

**Goudsmits, E, Blakey, LS, Chana, K, Sharples, GP and Birkett, JW**

**The analysis of organic and inorganic gunshot residue from a single sample**

<http://researchonline.ljmu.ac.uk/id/eprint/10538/>

### Article

**Citation** (please note it is advisable to refer to the publisher's version if you intend to cite from this work)

**Goudsmits, E, Blakey, LS, Chana, K, Sharples, GP and Birkett, JW (2019)  
The analysis of organic and inorganic gunshot residue from a single  
sample. Forensic Science International. ISSN 0379-0738**

LJMU has developed **LJMU Research Online** for users to access the research output of the University more effectively. Copyright © and Moral Rights for the papers on this site are retained by the individual authors and/or other copyright owners. Users may download and/or print one copy of any article(s) in LJMU Research Online to facilitate their private study or for non-commercial research. You may not engage in further distribution of the material or use it for any profit-making activities or any commercial gain.

The version presented here may differ from the published version or from the version of the record. Please see the repository URL above for details on accessing the published version and note that access may require a subscription.

For more information please contact [researchonline@ljmu.ac.uk](mailto:researchonline@ljmu.ac.uk)

<http://researchonline.ljmu.ac.uk/>

## The analysis of organic and inorganic gunshot residue from a single sample

### Abstract

The detection and interpretation of gunshot residue (GSR) can play an important role in the investigation of firearm related incidents. Recently, the potential of organic compounds to provide an additional means to discriminate between GSR and environmental particles, in particular in cases where lead-free ammunition is used, has been highlighted. This work describes a method for the extraction and detection of complementary organic and inorganic compounds from a single GSR sample, using a methodology that makes implementation in the current standard procedure feasible. GSR samples were collected from the shooter's hands following double and single discharges, using the traditional adhesive carbon aluminium stubs. Analysis of organic compounds was performed using solid-phase microextraction gas chromatography mass spectrometry (SPME-GC-MS), followed by analysis of the traditional inorganic particles using scanning electron microscopy coupled with energy-dispersive X-ray spectroscopy (SEM-EDX). Detection of both categorised organic GSR compounds (*e.g.* ethyl centralite, diphenylamine and 2-nitrodiphenylamine) and characteristic inorganic GSR has been achieved. Given the fact that the detected organic GSR compounds are relevant with respect to the confirmation of GSR materials, this method has successfully demonstrated the ability to obtain a total chemical profile from a single GSR sample, which has the potential to increase the probative value of GSR evidence.

Keywords: Forensic Science; Gunshot residue; Solid-phase microextraction; Scanning electron microscopy; Ballistics

### 1. Introduction

Gunshot residue (GSR) consists of a complex mixture of unburnt and partially burnt particles originating from the firearm, the firearm ammunition, and from combustion products, which are produced during the discharge of a firearm. The main sources of organic GSR (OGSR) compounds are ammunition components (*e.g.* propellant powder) and combustion products [1]. There are over a hundred organic compounds with a possible association to GSR [1, 2], many of which can be found in environmental and occupational materials [1, 3]. A small selection of around twenty of these

compounds have recently been highlighted as OGSR compounds that have a potential relevance to the confirmation of GSR materials [4].

When a firearm is discharged, GSR escapes through weapon openings and may subsequently deposit on surfaces in the near vicinity of the fired weapon [5, 6]. As a result, GSR could become evidence consequent to the criminal use of a firearm [7] and its detection and identification could provide valuable information in forensic investigations of the incident. Currently, the accepted forensic standard for the identification of gunshot residue is the analysis of inorganic GSR (IGSR) using scanning electron microscopy coupled with energy-dispersive X-ray spectrometry (SEM-EDX) [8, 9]. This is a non-destructive technique that provides both morphological information, as well as the elemental composition of individual particles [10, 11]. The ability, however, to extract complementary organic information could increase the probative value of GSR evidence and potentially provide an additional means to distinguish GSR from environmental residues [12], especially when lead-free ammunition is used.

Several methods for the detection of OGSR compounds from propellant powders, spent cases and actual GSR samples have been proposed (Table 1), however, a standard methodology for the collection, extraction and analysis of OGSR samples has not yet been established [1]. Limited research has been done with respect to obtaining both organic and inorganic information from a single sample. A prevalence study was performed where samples were collected from police stations and vehicles, which were then analysed using SEM-EDX and liquid chromatography coupled with tandem mass spectrometry (LC-MS/MS) respectively [13]. Another approach involved the removal of particles resembling propellant from a target cloth for Fourier Transform Infrared (FTIR) analyses, after which the cloth was stubbed to collect IGSR for SEM-EDX analysis [14].

In this work, the combination of gas chromatography coupled with mass spectrometry (GC-MS) and SEM-EDX is investigated, using solid-phase microextraction (SPME) as an extraction and pre-concentration technique for OGSR. SPME in combination with either GC-MS or ion mobility spectrometry (IMS) is commonly employed for OGSR analysis. SPME is a simple, solvent-free variety of solid phase extraction (SPE), and employs a fine fused silica fibre for the extraction of the analytes. It enables the collection of ultra-trace levels of analytes from various matrices by pre-concentrating the analytes onto the SPME fibre [12, 15]. Analysis of the entire sample is achieved by thermal desorption of the fibre directly into the IMS or GC inlet [16]. Good results have been achieved by SPME in combination with GC-MS or IMS for the analysis of OGSR compounds from samples such as propellant powders and spent cartridge

cases [12, 15, 17-20]. The application of SPME to the analysis of GSR samples collected from a shooter's hands, however, has not been reported before.

The purpose of this research was to obtain total chemical profiles of single GSR samples collected from a shooter's hands using the traditional adhesive carbon aluminium stubs [10, 11]. The developed SPME-GC-MS method was applied to samples generated using 3 different ammunition types, discharged with a pistol and a long barrel revolver. OGSR analysis is performed first in order to minimise any potential losses of OGSR compounds due to storage [21], followed by SEM-EDX analysis of IGSR.

## 2. Materials and Methods

### 2.1 GSR sample collection

GSR samples from 9 mm American Eagle and 9 mm Federal Premium were generated on the Merseyside Police range using a Glock 17 self-loading pistol. GSR samples from Alliant Unique were generated using self-loaded .38 rounds of ammunition, which were discharged using an Alfa long barrel .38/.357 revolver at the Grange Pistol and Rifle club range, Liverpool, UK.

All samples were collected at  $t = 0$  using 12 mm carbon tabs mounted on aluminium stubs (Agar Scientific, Essex, UK). The palm and back of the hand were sampled with at least 50 dabs, paying special attention to the webbing and upper surfaces of the thumb and index finger. Separate stubs were used to sample the right and left hand. Samples were collected following two discharges ( $n = 3$ ) for each ammunition type, whereby the shooter was standing upright holding the firearm with both hands. For the American Eagle ammunition samples were collected following single discharges ( $n = 6$ ) in a standing position. Before each test firing, the shooter's hands were cleaned thoroughly using isopropanol wipes. Blank samples were taken both from the shooter's hands and the sampler's hands. All samples were kept on ice until return to the laboratory where the samples were stored in a freezer at  $-18^{\circ}\text{C}$ .

Unburnt propellant samples were also collected, by pulling the bullets using a kinetic hammer.

### 2.2 SPME extractions

A 65  $\mu\text{m}$  polydimethylsiloxane/divinylbenzene (PDMS/DVB) fibre (Sigma Aldrich, Bellefonte, PA, USA) was used for SPME extractions. The sample, a stub or a single grain of unburnt propellant, was transferred to a glass 10 mL

headspace vial with a PTFE/silicone septum cap (Sigma Aldrich, Bellefonte, PA, USA) and pre-conditioned in an oven (Nabertherm) for 30 minutes at 80°C to allow the volatiles to enter the headspace. The extraction was performed in the oven at 80°C for 35 minutes [12, 17]. Thermal desorption of the analytes was accomplished in the injection liner at 250°C [12]. Blank stubs were also analysed to ensure no OGSR compounds were present.

Before every extraction the fibre was conditioned for 20 minutes in the GC inlet at 250°C [12], whilst the oven temperature was ramped to 150°C, and a blank run was carried out to ensure no carry-over or contamination occurred.

### *2.3 GC-MS analysis of OGSR*

Chromatographic analysis, optimised from the method reported by Dalby & Birkett [12], was performed on an Agilent 6890N Network GC system, equipped with a J&W scientific HP5-MS UI (30 m x 0.25 mm x 0.25 µm) column. A 0.75 mm I.D. SPME injection sleeve (Supelco, Bellefonte, PA, USA) was used to prevent band broadening. Sample introduction was performed in splitless mode without a solvent delay. The initial oven temperature was 50°C, which was increased in four temperature ramps: 10°C/min to 100°C, 5°C/min to 180°C held for 2.50 min, and 30°C/min to subsequently 200°C held for 2.50 min and 300°C held for 2 min. A flowrate of 1.2mL/min was maintained.

The GC was coupled to an Agilent 5975B Inert MSD system using electron ionisation (EI). In full scan mode, masses were scanned from m/z 40 to 500. Parameters of the developed selected ion monitoring (SIM) are provided in Table 2. Mass spectra for recorded peaks were further evaluated using the NIST database (NIST Mass Spectral Search Programme Version 2.0). Limits of detection determined for the OGSR compounds detected in the samples were in the range 1-50 ng (Table 2).

### *2.4 SEM-EDX analysis of IGSR*

Following OGSR analysis, samples were coated with a conductive layer of carbon using a Quorum Technologies Q150T ES Rotary pumped carbon coater. Analysis was performed with an SEM-EDX FEI Quanta 200 (Table 3). Oxford INCA GSR analysis software was used for the automatic identification of GSR materials, which were confirmed using manual acquisition and verification of characteristic particles, as defined by the ASTM and SWGGSR guidelines [10, 11].

### 3. Results and discussion

#### *3.1 Effect of stub heating*

Given the fact that the acquiring a full chemical profile of organic and inorganic GSR requires the stubs to be heated prior to SEM analysis, the influence of stub heating on IGSR detection must be considered. For this purpose GSR samples were collected from the shooter's hands following the discharge of a single round (standing position, firearm held in both hands), and cut in half for analysis. Guidelines by the ASTM and SWGGSR state that it is sufficient to analyse a portion of the stub's surface, given the fact that GSR is collected randomly across the surface of the stub and does not tend to cluster [10, 11, 22]. Analysis of two unheated stub halves of one sample (1L) confirmed this; the difference between the two stub halves was 3 particles or 4%. For all other stubs, one half of each sample was subjected to heating as per the SPME procedure before IGSR analysis was carried out. The number of characteristic particles detected on each half is shown in Table 4. The percentage indicates the relative value of characteristic particles detected on the stub half compared to the total on the whole stub.

Similar particle depositions were detected on most stubs (1L, 2L and 2R), of which sample 2L had a greater number of characteristic particles on the half that was subjected to heating. These results suggest that heating the stub does not have a significant adverse effect on the subsequent IGSR analysis. Therefore, SPME-GC-MS analysis followed by SEM-EDX detection appears to be a viable option for obtaining a total chemical profile of GSR samples.

#### *3.2 Analysis of unburnt propellant*

The organic composition of the test-fired ammunition has been determined by extracting single grains of unburnt propellant (Figure 1). The organic compositions across the different ammunition types are similar, however, AKII was only detected in Federal Premium propellant. In two of the three Alliant Unique grains 2,4-DNDPA was detected.

#### *3.3 OGSR analysis*

The results of the organic profile obtained from GSR samples collected after two discharges ( $n = 3$ ) for three firearm-ammunition combinations is shown in Figure 2. The peak area of DPA obtained from the American Eagle ammunition is shown on the primary axis (left-hand side), the peak areas of the other compounds are shown on the secondary axis. Figure 2 shows that all stabilisers that were detected in a single grain of 9 mm American Eagle and Alliant Unique propellant (Figure 1) were also detected in their respective gunshot residues. Only 2,4-DNDPA, which was detected in two of the three single grains of Alliant Unique, was not detected. DPA was the only stabiliser detected in the 9 mm Federal Premium propellant. It is hypothesised that this may be caused by a more complete combustion process. Experiments involving the analysis of burnt propellant rather than GSR showed that burnt 9 mm Federal Premium propellant resulted in the lowest recovery for all stabilisers. The grains of this propellant were very small compared to the other propellants, which generally indicates that the propellant burns faster [23].

In addition to the compounds shown in Figure 2, phthalates (DBP and DIBP) were detected, but due to their generic nature, they were not considered further. Variation seen in a number of OGSR components is mostly likely due to the complexity of the firing process, which leads to the creation of varying amounts and compositions of gunshot residue [5].

The results of the organic profile obtained from GSR samples collected after single discharges ( $n = 6$ ) of American Eagle ammunition is shown in Figure 3. The peak area of DPA is shown on the primary axis (left-hand side), the peak areas of the other compounds are shown on the secondary axis.

Figure 3 shows similar peak areas for DPA and 2-NDPA on both of the shooter's hands, however, 2-NDPA was only detected in half of the samples. In total, a greater amount of EC was detected on the left hand, but EC was not detected in samples 2 and 3 for the left and right hand respectively. In only two samples collected from the left hand was 4-NDPA detected, leading to the low peak area for this compound overall on the left hand.

The peak areas of DPA, EC, and 2-NDPA obtained from the shooter's right hand are comparable for both double and single discharges. The peak areas of 4-NDPA were greater following a single discharge. The lack of increase in GSR when doubling the number of discharges has been reported in literature before, and has been attributed to the inherent heterogeneous nature of the deposition rather than the result of the sampling and extraction protocol [24, 25].

### 3.4 Total chemical profile

The results of the OGSR analysis have been compared against a recently proposed categorisation system for OGSR compounds [4]. The results of both double and single discharges are combined with results obtained from IGSR analysis in Table 5. Only characteristic inorganic particles (containing lead, antimony, and barium (PbSbBa)) are taken into account.

These results show that more than 100 characteristic inorganic particles were detected in all samples. For two propellants, additional categorised OGSR compounds were detected. EC is a first category compound, owing to its very strong association with GSR and very restricted applications unrelated to GSR. DPA and its nitro-derivatives are second category compounds, due to their strong association with GSR in conjunction with less restricted applications unrelated to GSR [4]. With the detection of both categorised OGSR compounds and characteristic IGSR, the acquisition of a complementary organic and inorganic GSR profile has been accomplished. The detection of first and second category OGSR compounds demonstrates the ability of OGSR to strengthen the value of GSR evidence. The absence of categorised OGSR compounds in Federal Premium GSR samples suggest that the OGSR composition in GSR may be more variable than the IGSR composition.

### 4. Conclusion

In this work the generation of a total chemical profile from a single GSR sample has been accomplished using a combination of SPME-GC-MS and SEM-EDX. The successful application of the optimised SPME-GC-MS method was demonstrated with respect to the detection of OGSR compounds relevant to the confirmation of GSR materials. In all samples characteristic IGSR was detected, in combination with known propellant stabilisers. For two firearm-ammunition combinations first category OGSR compounds, *i.e.* EC, were identified. The results have shown no adverse effect of the employed method on the subsequent detection and confirmation of IGSR particles.

The strength of the proposed method is the practical applicability for real casework. The fact that the sample collection and IGSR analysis were performed according to the current standard method, enables the implementation of the proposed method without alterations except for cool storage of the sample. Furthermore, this method accounts for the limited storage time associated with OGSR compounds, and enables carbon coating the sample where necessary. It is recognised that due to the small sample size further work is still required before this method could be used as a



robust and reliable technique to strengthen the value of GSR evidence. Further work by the authors will focus on applying the method to a greater range of ammunition types.

## 5. References

1. Goudsmits, E., Sharples, G.P., and Birkett, J.W., *Recent trends in organic gunshot residue analysis*. Trends in Analytical Chemistry, 2015. **74**: p. 46-57, 10.1016/j.trac.2015.05.010
2. Gallidabino, M., Romolo, F.S., and Weyermann, C., *Characterization of volatile organic gunshot residues in fired handgun cartridges by headspace sorptive extraction*. Analytical and Bioanalytical Chemistry, 2015. **407**(23): p. 7123-7134, 10.1007/s00216-015-8874-0
3. Dalby, O., Butler, D., and Birkett, J.W., *Analysis of gunshot residue and associated materials--a review*. Journal of Forensic Sciences, 2010. **55**(4): p. 924-943, 10.1111/j.1556-4029.2010.01370.x
4. Goudsmits, E., Sharples, G.P., and Birkett, J.W., *Preliminary classification of characteristic organic gunshot residue compounds*. Science and Justice, 2016. **56**(6): p. 421-425, 10.1016/j.scijus.2016.06.007
5. Rijnders, M.R., Stamouli, A., and Bolck, A., *Comparison of GSR composition occurring at different locations around the firing position*. Journal of Forensic Sciences, 2010. **55**(3): p. 616-623, 10.1111/j.1556-4029.2009.01292.x
6. Blakey, L.S., et al., *Fate and Behavior of Gunshot Residue-A Review*. Journal of Forensic Sciences, 2017, 10.1111/1556-4029.13555
7. Chang, K.H., et al., *Gunshot residue analysis and its evidential values: a review*. Australian Journal of Forensic Sciences, 2013. **45**(1): p. 3-23, 10.1080/00450618.2012.691546
8. Castellanos, A., Bell, S., and Fernandez-Lima, F., *Characterization of firearm discharge residues recovered from skin swabs using sub-micrometric mass spectrometry imaging*. Analytical Methods, 2016. **8**(21): p. 4300-4305, 10.1039/c6ay00096g
9. Taudte, R.V., et al., *Detection of gunshot residues using mass spectrometry*. BioMed Research International, 2014. **2014**: p. 1-16, 10.1155/2014/965403
10. ASTM International, 2010, *Standard guide for gunshot residue analysis by scanning electron microscopy/energy dispersive X-ray spectrometry*, E1588, ASTM International: West Conshohocken, PA.
11. SWGGSR, 2011, *Guide for Primer Gunshot Residue Analysis by Scanning Electron Microscopy/Energy Dispersive X-Ray Spectrometry 11-29-11*, SWGGSR: Cincinnati, OH.
12. Dalby, O. and Birkett, J.W., *The evaluation of solid phase micro-extraction fibre types for the analysis of organic components in unburned propellant powders*. Journal of Chromatography A, 2010. **1217**(46): p. 7183-1788, 10.1016/j.chroma.2010.09.012
13. Ali, L., et al., *A Study of the Presence of Gunshot Residue in Pittsburgh Police Stations using SEM/EDS and LC-MS/MS*. Journal of Forensic Sciences, 2016. **61**(4): p. 928-938, 10.1111/1556-4029.13077
14. Brozek-Mucha, Z., *A study of gunshot residue distribution for close-range shots with a silenced gun using optical and scanning electron microscopy, X-ray microanalysis and infrared spectroscopy*. Science and Justice, 2017. **57**(2): p. 87-94, 10.1016/j.scijus.2016.11.004
15. Weyermann, C., et al., *Analysis of organic volatile residues in 9 mm spent cartridges*. Forensic Science International, 2009. **186**(1-3): p. 29-35, 10.1016/j.forsciint.2009.01.005
16. Vas, G. and Vekey, K., *Solid-phase microextraction: a powerful sample preparation tool prior to mass spectrometric analysis*. Journal of mass spectrometry, 2004. **39**(3): p. 233-54, 10.1002/jms.606
17. Gallidabino, M., et al., *Development of a Novel Headspace Sorptive Extraction Method To Study the Aging of Volatile Compounds in Spent Handgun Cartridges*. Analytical Chemistry, 2014. **86**: p. 4471-4478,
18. Joshi, M., Rigsby, K., and Almirall, J.R., *Analysis of the headspace composition of smokeless powders using GC-MS, GC- $\mu$ ECD and ion mobility spectrometry*. Forensic Science International, 2011. **208**(1-3): p. 29-36, 10.1016/j.forsciint.2010.10.024

19. Andrasko, J. and Ståhling, S., *Time since discharge of spent cartridges*. Journal of Forensic Sciences, 1999. **44**(3): p. 487-495,
20. Chang, K.H. and Abdullah, A.F.L., *Extraction efficiency of the sequential solid phase microextraction of gunshot residues from spent cartridges*. Malaysian Journal of Forensic Sciences, 2014. **5**(1): p. 7-11,
21. Gassner, A.-L., et al., *Organic gunshot residues: Observations about sampling and transfer mechanisms*. Forensic Science International, 2016. **266**: p. 369-378, 10.1016/j.forsciint.2016.06.029
22. Wolton, G.M., et al., *Final report on particle analysis for gunshot residue detection, report ATR-77(7915)-3*. 1977, The Aerospace Corporation: El Segundo, CA. p. 95.
23. Pun, K.M. and Gallusser, A., *Macroscopic observation of the morphological characteristics of the ammunition gunpowder*. Forensic Science International, 2008. **175**(2-3): p. 179-85, 10.1016/j.forsciint.2007.06.021
24. Taudte, R.V., et al., *The development and comparison of collection techniques for inorganic and organic gunshot residues*. Anal Bioanal Chem, 2016. **408**(10): p. 2567-2576, 10.1007/s00216-016-9357-7
25. Moran, J.W. and Bell, S., *Skin permeation of organic gunshot residue: implications for sampling and analysis*. Analytical Chemistry, 2014. **86**(12): p. 6071-6079, 10.1021/ac501227e
26. Thomas, J.L., Lincoln, D., and McCord, B.R., *Separation and detection of smokeless powder additives by ultra performance liquid chromatography with tandem mass spectrometry (UPLC/MS/MS)*. Journal of Forensic Sciences, 2013. **58**(3): p. 609-615, 10.1111/1556-4029.12096
27. De Perre, C., et al., *Separation and identification of smokeless gunpowder additives by capillary electrochromatography*. Journal of Chromatography A, 2012. **1267**: p. 259-265, 10.1016/j.chroma.2012.07.039
28. Cascio, O., et al., *Analysis of organic components of smokeless gunpowders: high-performance liquid chromatography vs. micellar electrokinetic capillary chromatography*. Electrophoresis, 2004. **25**(10-11): p. 1543-1547, 10.1002/elps.200305883
29. Lopez-Lopez, M., Delgado, J.J., and Garcia-Ruiz, C., *Ammunition identification by means of the organic analysis of gunshot residues using Raman spectroscopy*. Analytical Chemistry, 2012. **84**(8): p. 3581-3585, 10.1021/ac203237w
30. Goudsmits, E., Sharples, G.P., and Birkett, J.W., *Organic compositional analysis of propellant powders using monolithic material sorption extraction (MMSE) - a feasibility study*. Journal of Forensic Science and Research, 2017. **1**: p. 68-76,
31. Colón, Y., et al., *Ion mobility spectrometry determination of smokeless powders on surfaces*. International Journal of Ion Mobility Spectrometry, 2002. **5**(3): p. 127-131,
32. Andrasko, J., Norberg, T., and Ståhling, S., *Time since discharge of shotguns*. Journal of Forensic Sciences, 1998. **43**(5): p. 1005-1015,
33. Andrasko, J. and Ståhling, S., *Time since discharge of rifles*. Journal of Forensic Sciences, 2000. **45**(6): p. 1250-1255,
34. Andrasko, J. and Ståhling, S., *Time since discharge of pistols and revolvers*. Journal of Forensic Sciences, 2003. **48**(2): p. 1-5,
35. Gilchrist, E., et al., *Characterisation of gunshot residue from three ammunition types using suppressed anion exchange chromatography*. Forensic Science International, 2012. **221**(1-3): p. 50-56, 10.1016/j.forsciint.2012.03.024
36. Bueno, J. and Lednev, I.K., *Attenuated total reflectance-FT-IR imaging for rapid and automated detection of gunshot residue*. Analytical Chemistry, 2014. **86**(7): p. 3389-3396, 10.1021/ac4036718
37. Bueno, J., Sikirzhyski, V., and Lednev, I.K., *Raman spectroscopic analysis of gunshot residue offering great potential for caliber differentiation*. Analytical Chemistry, 2012. **84**(10): p. 4334-4339, 10.1021/ac203429x
38. Arndt, J., et al., *Preliminary evaluation of the persistence of organic gunshot residue*. Forensic Science International, 2012. **222**(1-3): p. 137-145, 10.1016/j.forsciint.2012.05.011
39. Yeager, B., et al., *Evaluation and validation of ion mobility spectrometry for presumptive testing targeting the organic constituents of firearms discharge residue*. Analytical Methods, 2015. **7**(22): p. 9683-9691, 10.1039/c5ay02417j
40. Benito, S., et al., *Characterisation of organic gunshot residues in lead-free ammunition using a new sample collection device for liquid chromatography–quadrupole time-of-flight mass spectrometry*. Forensic Science International, 2015. **246**: p. 79-85, 10.1016/j.forsciint.2014.11.002

41. Gassner, A.L. and Weyermann, C., *LC-MS method development and comparison of sampling materials for the analysis of organic gunshot residues*. *Forensic Science International*, 2016. **264**: p. 47-55, 10.1016/j.forsciint.2016.03.022
42. Morelato, M., et al., *Screening of gunshot residues using desorption electrospray ionisation-mass spectrometry (DESI-MS)*. *Forensic Science International*, 2012. **217**(1-3): p. 101-106, 10.1016/j.forsciint.2011.10.030

## Tables and Figures

Table 1: Methods employed for the sampling, extraction and analysis of OGSR compounds

Sample	Sampling method	Extraction	Analytical technique	Ref
Propellant powder	-	Solvent extraction	GC-MS, UPLC-MS/MS, CE, MEKC, Raman	[12, 26-30]
Propellant powder	-	SPME	GC-MS, IMS	[12, 15, 18]
Propellant powder	-	MMSE	GC-MS	
Propellant transfer	Wipe	-	IMS	[31]
GSR; gun barrel	-	SPME	GC-TEA, GC-FID	[32-34]
GSR; spent cartridges	-	SPME	GC-MS, IMS, GC-FID, GC-TEA	[12, 15, 19, 20]
GSR; spent cartridges	-	Stir bar	GC-MS	[2, 17]
GSR; spent cartridges	-	Solvent extraction	Anion exchange chromatography	[35]
GSR; target cloth	Tape lift method	-	ATR-FTIR, Raman	[36, 37]
GSR; target cloth	-	-	Raman	[29]
GSR; objects	Stub	Solvent extraction	LC-MS/MS	[13]
GSR; skin	Swab	-	IMS	[38, 39]

GSR; skin	Swab	Solvent extraction	LC-QTOF, UHPLC-MS, LC-MS/MS	[24, 40, 41]
GSR; skin	Stub	-	DESI-MS	[42]
GSR; skin	Stub	Solvent extraction	LC-QTOF, UHPLC-MS, LC-MS/MS	[24, 40, 41]

Table 2: SIM method parameters<sup>1</sup>

Group	Compounds	Acronym	Parent ions (m/z)	Product ions (m/z)	SIM detection start time (min)	LOD for compounds detected (ng)
1	Ethylphenylamine	EPA	121.10	106.1, 77.1	6.50	
2	Camphor		152.1	108.1, 95.1, 81.1	7.23	
3	2-Nitrotoluene	2-NT	137.1	120.1, 91.1, 65.1	7.56	
	3-Nitrotoluene	3-NT	137.1	91.1, 65.1		
	4-Nitrotoluene	4-NT	137.1	91.1, 65.1		
4	Triacetin		-	145.1, 103.0, 43.1	11.00	
	Nitroglycerin	NG	-	151.0, 76.0, 46.1		5
5	Dimethyl phthalate	DMP	194.0	163.1, 77.1	14.00	
	2,6-Dinitrotoluene	2,6-DNT	182.0	165.0, 89.1, 77.1,		
	2,5- Dinitrotoluene	2,5-DNT	182.0	63.1,		
	2,3- Dinitrotoluene	2,3-DNT	182.0	165.0, 89.1, 63.1		
	2,4- Dinitrotoluene	2,4-DNT	182.0	165.0, 135.1		
	3,4-Dinitrotoluene	3,4-DNT	182.0	165.0, 89.1, 63.1 63.1, 89.1		
6	Diethyl phthalate	DEP	222.10	177.1, 149.0	17.70	
7	Diphenylamine	DPA	169.1	168.1, 84.0, 51.1	18.00	1
8	Methyl centralite	MC	240.1	134.1, 106.1, 77.1	21.00	
	Carbazole		167.1	166.1, 139.1,		
9	Diisobutyl phthalate	DIBP	-	223.1, 149.0, 57.1	23.70	1

<b>10</b>	Ethyl centralite	EC	268.1	120.1, 148.1, 77.1	24.20	2.5
<b>11</b>	Dibutyl phthalate	DBP	-	149.0	25.10	
	2-Nitrodiphenylamine	2-NDPA	214.1	180.1, 167.1, 169.1, 139.1		10
<b>12</b>	Akardite II	AKII	226.1	169.1, 168.1, 77.1	26.20	3
<b>13</b>	4-Nitrodiphenylamine	4-NDPA	214.1	184.1, 168.1, 167.1	28.60	50
	2,4-Dinitrodiphenylamine	2,4-DNDPA	259.1	168.1, 167.1, 139.1		

<sup>1</sup> Ions indicated in grey are repeated ions within a group.

Table 3: IGSR analysis parameters.

Parameter	Value
Accelerating voltage	25 kV
Working distance	10 mm
Magnification	x 250
Minimum size of the particle	1 µm

Table 4: IGSR analysis of heated and non-heated samples collected after single discharges

Sample no.	Sample location	Subjected to SPME	Characteristic particles	
			No. per half stub	% of whole stub
<b>1L-a</b>	Left hand shooter	No	40	52
<b>1L-b</b>	Left hand shooter	No	37	48
<b>1R-a</b>	Right hand shooter	Yes	99	38
<b>1R-b</b>	Right hand shooter	No	164	62
<b>2L-a</b>	Left hand shooter	Yes	244	53
<b>2L-b</b>	Left hand shooter	No	217	47
<b>2R-a</b>	Right hand shooter	Yes	162	42
<b>2R-b</b>	Right hand shooter	No	226	58

Table 5: Chemical profile GSR collected from the shooter's hands

Ammunition	OGSR category 1	OGSR category 2	Not classified	IGSR
------------	-----------------	-----------------	----------------	------

<b>American Eagle</b> 1 discharge	EC	DPA + 2-NDPA and 4-NDPA	PbSbBa > 100 particles
<b>American Eagle</b> 2 discharges	EC	DPA + 2-NDPA and 4-NDPA	PbSbBa > 100 particles
<b>Federal Premium</b> 2 discharges	-	DPA	PbSbBa > 100 particles
<b>Alliant Unique</b> 2 discharges	EC	DPA + 2-NDPA and 4-NDPA	PbSbBa > 100 particles

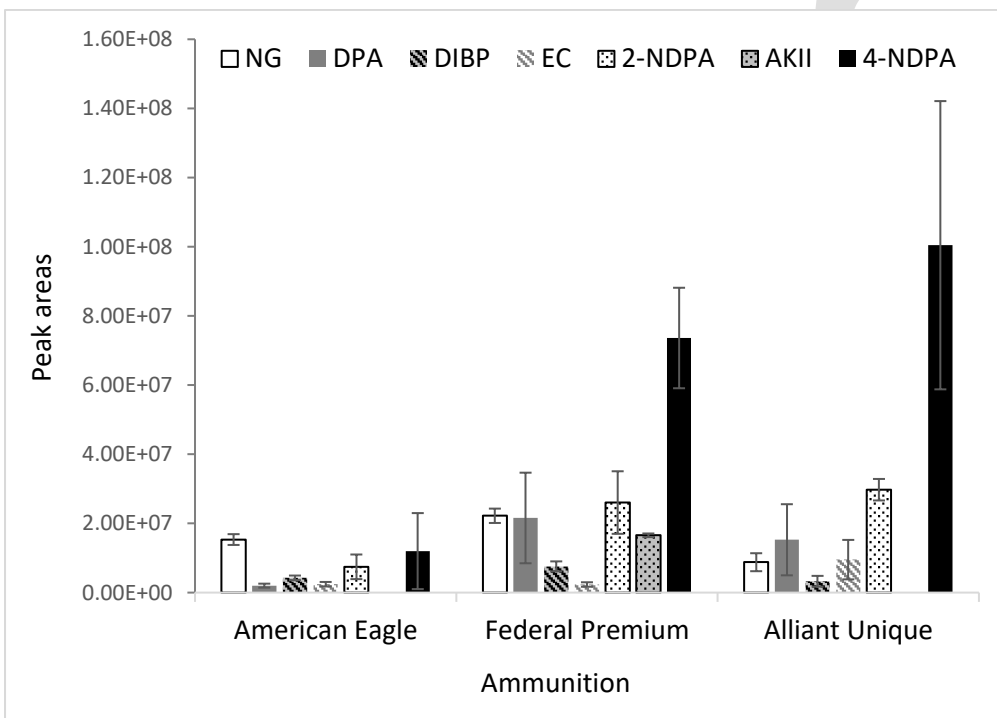


Figure 1: OGSR characterisation of single grains of propellant (n = 3)

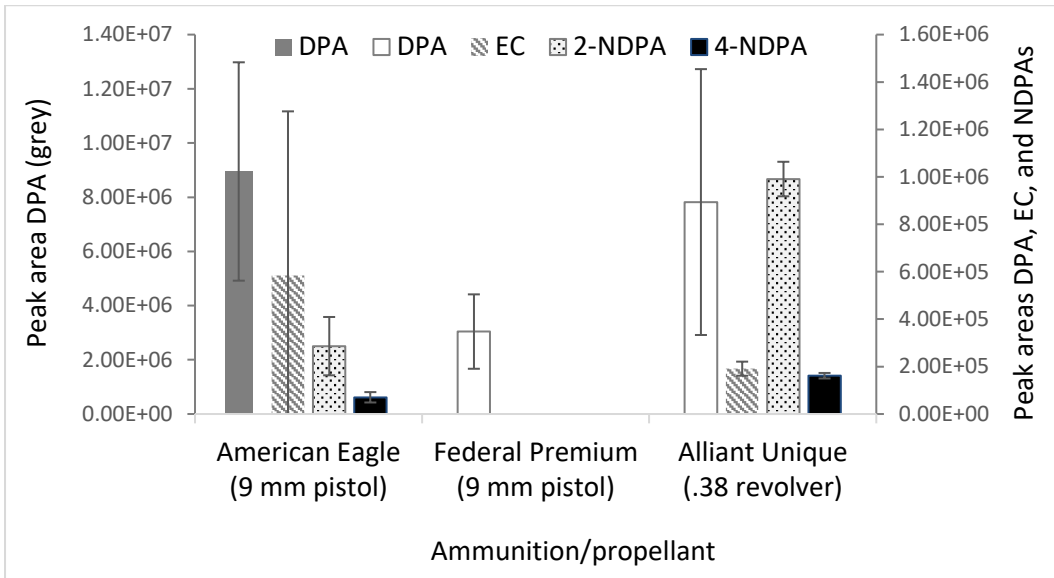


Figure 2: OGSR collected from the shooter's right hand after two discharges (n = 3)

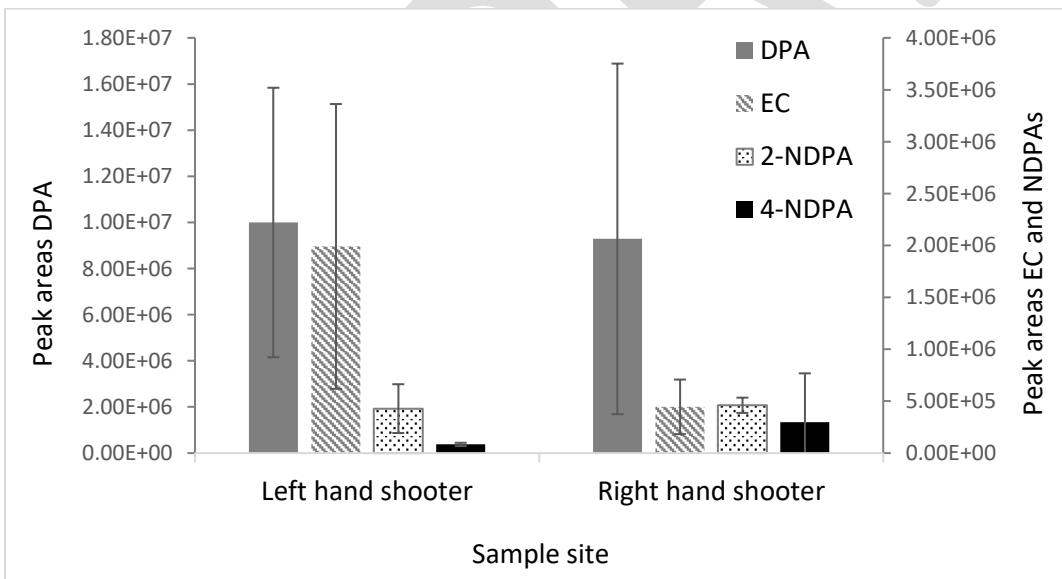


Figure 3: OGSR collected from the shooter's hands after single discharges of American Eagle ammunition using a 9 mm pistol (n = 6)