

PAPER • OPEN ACCESS

Impact of Substitute Portland Cement with CKD on the Mechanical and Durability Characteristics of Cement Mortar

To cite this article: Duaa Al-Faluji *et al* 2021 *IOP Conf. Ser.: Mater. Sci. Eng.* **1090** 012035

View the [article online](#) for updates and enhancements.



The Electrochemical Society
Advancing solid state & electrochemical science & technology

240th ECS Meeting ORLANDO, FL

Orange County Convention Center Oct 10-14, 2021



Abstract submission due: April 9

SUBMIT NOW

Impact of Substitute Portland Cement with CKD on the Mechanical and Durability Characteristics of Cement Mortar

Duaa AL-Faluji ¹, Muna M. AL-Rubaye ², Mohammed Salah Nasr ³, Ali A. Shubbar ^{4,*}, Zainab S. Al-Khafaji ⁵, Ahmed Alkhayyat ⁶ and Mustafa S. Abdulraheem ²

¹ Ashour General Construction CO. Nidhal Street, Baghdad, Iraq.

² Department of Civil Engineering, College of Engineering, University of Babylon, Iraq.

³ Technical Institute of Babylon, Al-Furat Al-Awsat Technical University (ATU), Iraq.

⁴ Department of Civil Engineering, Liverpool John Moores University, UK.

⁵ Al-Furat Al-Awsat Distribution Foundation \ Ministry of Oil \ Babylon, Iraq.

⁶ Department of Building and Construction Technical Engineering, College of Technical Engineering, the Islamic University, 54001 Najaf, Iraq.

* Corresponding author: alishubbar993@gmail.com , A.A.Shubbar@2014.ljmu.ac.uk

Abstract. Cement mortar is a binding material that is made of cement, sand and water. In general, mixes of mortar are made of raw materials. However, using raw materials in producing mortar leads to many environmental and economic issues. One of the most common solutions to reduce these issues is replacing raw materials by waste and/or by-product materials; especially replacing cement. The aim of this research is to explore the characteristics of mortar mixes after partially replacing Ordinary Portland Cement (OPC) by Cement Kiln Dust (CKD) at three percentages (10%, 20% and 30%) in terms of initial and final setting time, compressive strength and Ultrasonic Pulse Velocity (UPV). The control mortar specimen (mortar containing OPC only) results were adopted for comparison with results of mortar mixes that incorporated CKD. Results showed that increment in CKD replacement percentages led to a decrement in the compressive strength and UPV and an increment in the setting time.

1. Introduction

Mortar is made of raw materials of (cement, sand and water). It has a flowable and workable behaviour, so it could be utilised in binding, plastering and pointing [1]. There are a lot of issues related to use the raw materials in mortar production. The issues are environmental and economical. The environmental issues are mainly represented by pollution and landslide, while the economic issues are represented by raised production and maintenance cost.

Cement production release carbon dioxide (CO₂) to the environment [2–11]. The quantity of the released carbon dioxide from producing 1 tonne of Portland cement is estimated to be 1 tonne. This amount of carbon dioxide represents about 7% of global production [12–21]. The limestone calcination contributes to about a little over half of the CO₂ quantity, while the used fuel to raise the temperature of the cement kiln to the required level contributes around third of the CO₂ quantity.



Operations of grinding and transportation add about 10% to the CO₂ quantity [22]. Therefore, carbon dioxide emissions must be reduced to maintain the environment [23].

In addition, there is a gap between the continuous increase in the human population and the limited available raw materials. Therefore, new materials that have an acceptable strength and low cost should be founded. Researchers have suggested that raw materials could be replaced by waste materials to solve the limited raw materials sources issue.

Cement kiln dust (CKD) is a waste material that is produced throughout the cement industrialised. It is a fine powdery material and its appearance is similar to that of Portland cement [24]. The annual production of CKD in the United States is estimated to be 15 million tonnes [25]. Although CKD could be reciprocated in the process of making cement to minimize its quantity, this way was considered not feasible. Therefore, CKD should be recycled/reused in the industry for the purpose of sustainable development. The reported researches on the usage of CKD as a cement substitute material, however, are incomplete and later age inquiries (more than one year) have not been considered.

The feasibility of utilizing (CKD) as a mixed cement material to research the impact of this partly substitution on the most significant characteristics of cement paste, mortar and concrete is investigated by Hassan, et al., [26]. The cement substitution amounts with the same volume of dust (CKD) have been (5%, 10%, 15%, 20%, 25%, 30%) by weight. For contrast, a standard concrete, mortar and cement paste mix were produced as well. The initial setting time of every cement paste and the concrete and mortars strengths of tensile and compressive were included in the measured products. Water curing has been utilized on both samples and the strength tests were conducted at (3, 7, 28) days. Experimental data findings show that (CKD) could be utilized as a partly cement substance effectively. With the growth in (CKD) content attributable to the large level of alkalis and lime in (CKD), the initial setting period of the cement paste is shortened. In general, with the increase of (CKD) material, the compressive intensity was seen to decrease. Compared to the reference blends, the (10) percent replacement standard provided the strongest performance for the compressive strengths of concretes and mortars at all levels, and this replacement level also had a major impact on the tensile strengths of concretes and mortars at an early era. It has been observed that the greater mortars tensile strength was retained at (7, 28) days by (15) percent (CKD) substitution, while a (25) percent (CKD) had the same impact at (3 days and 28 days). However, the goal of this analysis is to experimentally explore the impact on the initial and final setting period, compressive intensity and Ultrasonic Pulse Velocity (UPV) characteristics of substitute Ordinary Portland Cement (OPC) with CKD. OPC was substituted with up to 30 percent wt. of CKD for this reason.

2. Materials and methodology

2.1 Testing Materials

2.1.1 *Sand*. Building sand passing from sieve size 3.35 mm has been utilised in this research.

2.1.2 Cementitious materials

2.1.2.1 Cement.

The utilised cement in this research was ordinary Portland cement kind CEM-II / A / LL 32.5-N. Its supplier was CEMEX Quality Department, Warwickshire, UK. Table 1 presents the chemical properties of cement. **This cement complies with BS EN 197-1 [27].**

2.1.2.2 Cement kiln dust (CKD).

CKD utilized in this research was supplied by Department of Quality CEMEX, Warwickshire, UK. Its chemical properties were tabled in Table 1.

Table 1: Chemical investigation for OPC and CKD.

Detail	OPC	CKD
CaO %	65.21	57.23
Al ₂ O ₃ %	1.70	4.2
Fe ₂ O ₃ %	1.64	3.8
SiO ₂ %	24.56	16.52
MgO %	1.30	0.8
Na ₂ O %	1.34	0.23
K ₂ O %	0.82	6.72
SO ₃ %	2.62	4.31
pH	12.73	12.75

2.2 Mixing Proportions

OPC was replaced by CKD with different percentages (10, 20 and 30) percentage. Table 2 presents the mix proportions and designations for samples of mortar. The proportion of sand to binder (S/B) and water to binder (W/B) have been, 2.5 and 0.4 [20], respectively.

Table 2. Mixing Design

Mix	OPC%	CKD%	W/B	S/B
M3	70	30	0.4	2.5
M2	80	20	0.4	2.5
M1	90	10	0.4	2.5
Control	100	0	0.4	2.5

2.3 Testing Program

2.3.1 Final and Initial setting time.

The apparatus of Vicat has been utilized to measure the final and initial setting time according to BS EN 196-3 [28].

2.3.2 Compressive strength test.

The test of compressive strength was performed depending on BS EN 196-1 [29]. The curing of specimens were done the lab in the laboratory, and the curing conditions were $20 \pm 2^\circ \text{C}$. Curing period was 1, 2, 3, 7, 14, 21, 28, 56, 90 and 550 days. Two samples with of 40x40x160 mm dimensions were prepared for each mixing ratio at curing period. 3 points loading has been utilized to breakdown every prism sample into 2 halves, and the final compressive strength magnitudes have been represented by the average of four parts.

2.3.3 UPV test.

The UPV test was performed for all mixing mortar ratios. The test was conducted according to BS EN1881-203 [30]. Cubic moulds (100 x 100 x100 mm) were used to conduct this test. Three samples

were produced for each mixing ratios and for each curing period and they were tested after 1, 2, 3, 7, 14, 21, 28, 56, 90 and 550 curing days.

3. Results and discussion

3.1 Setting time

Consequences of the final and initial setting time of the four mortar mixes (control, M1, M2 and M3) are demonstrated in Table 3. The final and initial setting time expand with increasing replacement percentage of OPC by CKD. The final and initial setting times of mortar mixes (M1, M2 and M3) were greater than that of control mortar mix.

Table 3. Results of the initial and final setting time.

Mix	Initial (min)	Final (min)
Control	270	290
M1	295	330
M2	300	345
M3	315	355

3.2 Compressive strength

The mortars Compressive strength consequences made of various percentages of (CKD and OPC) at various curing periods are obtainable in Figure 1.

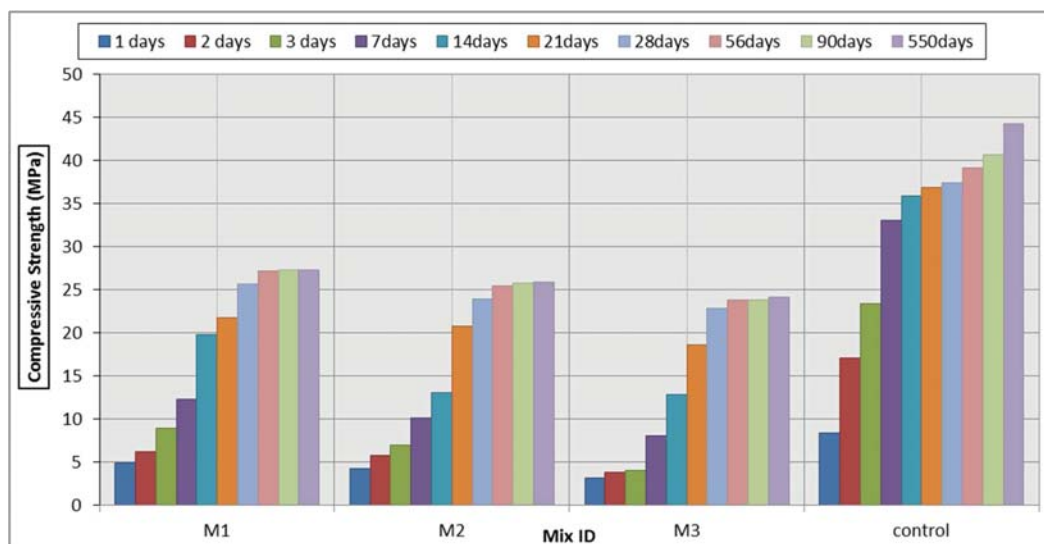


Figure 1. The observation of Compressive strength test

The control mix produced the maximum compressive strength of all other mixtures at all curing periods. However, the best compressive strength outcomes relative to other mixtures (M2 and M3) were obtained by replacing OPC with 10 percent CKD (M1). At the early curing period of 1 day, the mortar mix (M1) also reached 58 percent compressive power of the control mix and 62 percent at the

late curing period of 550 days. Although the compressive intensity of mixtures (M2 and M3) decreased relative to mixtures (M1), the growing substitution proportion of CKD in the mixture decreased. In contrast with the control mix at 1 day, the compressive intensity ratios of the mixtures (M2) and (M3) were 50 percent and 38 percent and 59 percent and 54 percent respectively at 550 days. The compressive power improved with the rising healing ages for all four mortar blends. Substitution of 30 percent of OPC with CKD (M3) cause in a substantial decrease in compressive intensity at all healing ages relative to the control mortar combination.

The cement clinker substitution, that is ultimately responsible for developing strength, may be due to this decline in compressive strength. In addition, owing to the vast number of alkalis in CKD, a kind of crystallization of hydration products is likely to occur. This could contribute to an open pore structure in the hardened samples that decreases the compressive strength of the samples. [31]. These results agreed with Bhatti [32–34] who found that setting time, strength and workability decreased when cement was replaced by CKD alone.

3.3 UPV

The UPV test results of mortar mixes (control, M1, M2 and M3) at 1, 2, 3, 7, 14, 21, 28, 56, 90 and 550 days of curing are demonstrated in Figure 2.

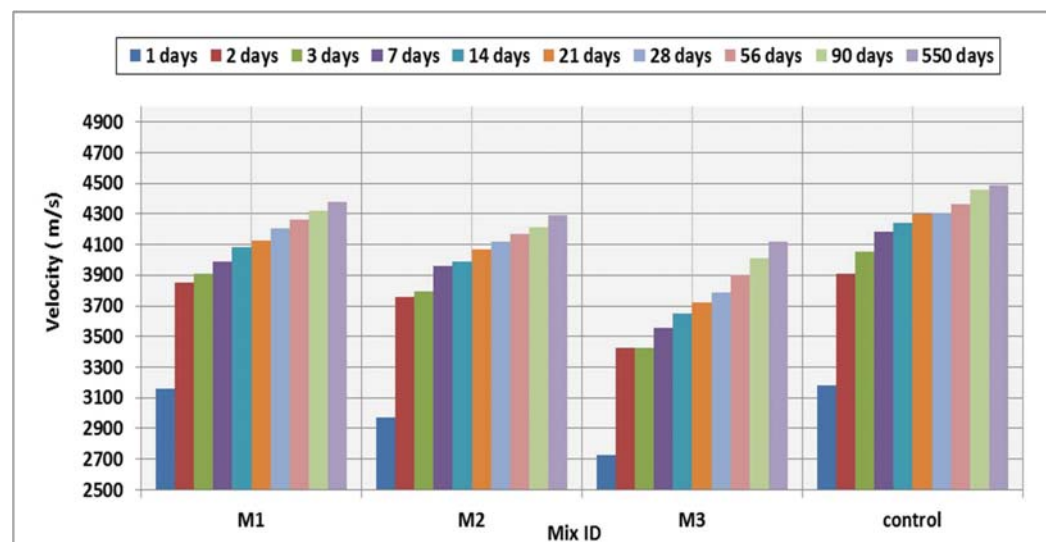


Figure 2. The observation of UPV test

Figure 2 demonstrates that the UPV values of mixtures (M3, M2, M1 and control) improved with increasing the duration of curing. However, increasing the replacement percentage of OPC with CKD resulted in a reduction of the UPV values.

4. Conclusion

Depending on the previous consequences and discussion, the following findings were observed:

1. Controlling mixture gained the best compressive strength at different curing period comparison with other mixtures.
2. The compressive strength of sample M1 is greater comparison with of M2 and M3 as it contains less CKD.
3. Increasing the percentage of substitution CKD in mixture led to decrease the compressive strength.
4. Controlling mixture gained the highest results in UPV test at all curing periods.

5. The mortar mix M1 achieved the highest UPV results in comparison with M2 and M3.
6. The UPV increased with increasing of curing ages, but is decreased with increasing of replacement percentage.

Authors recommended using other waste or by-products materials [35] including silica fume, stainless steel powder, fly ash, crude oil wastes, ground granulated blast furnace slag, agricultural waste [36–56], industrial wastes [57,58], municipal solid wastes [59] as well as water and wastewater sludge [60–63] to enhance the resulting mortar (or concrete). Application of such materials in reinforced concrete beams is also recommended [64].

5. References

- [1] Hasan A and Kabir H 2011 *Study on the strength behaviour of mortar using slag as partial replacement of sand* (Chittagong University of Engineering & Technology)
- [2] Nasr M S, Hasan Z A and Abed M K 2019 Mechanical Properties of Cement Mortar Made with Black Tea Waste Ash as a Partial Replacement of Cement *Eng. Technol. J.* **37**, Part C 45–9
- [3] Shubbar A A, Al-Shaer A, AlKizwini R S, Hashim K, Al Hawesah H and Sadique M 2019 Investigating the influence of cement replacement by high volume of GGBS and PFA on the mechanical performance of cement mortar *IOP Conference Series: Materials Science and Engineering* vol 584 (IOP Publishing) p 12022
- [4] Shubbar A A, Jafer H, Dulaimi A, Hashim K, Atherton W and Sadique M 2018 The development of a low carbon binder produced from the ternary blending of cement, ground granulated blast furnace slag and high calcium fly ash: an experimental and statistical approach *Constr. Build. Mater.* **187** 1051–60
- [5] Shubbar A A F, Jafer H M, Dulaimi A F D, Atherton W and Al-Rifaie A 2017 The Development of a Low Carbon Cementitious Material Produced from Cement, Ground Granulated Blast Furnace Slag and High Calcium Fly Ash *Int. J. Civil, Environ. Struct. Constr. Archit. Eng.* **11** 905–8
- [6] Nasr M S, Shubbar A A, Abed Z-A R and Ibrahim M S 2020 Properties of eco-friendly cement mortar contained recycled materials from different sources *J. Build. Eng.* **31** 101444
- [7] Shubbar A A, Al-Jumeily D, Aljaaf A J, Alyafei M, Sadique M and Mustafina J 2019 Investigating the Mechanical and Durability Performance of Cement Mortar Incorporated Modified Fly Ash and Ground Granulated Blast Furnace Slag as Cement Replacement Materials 2019 12th International Conference on Developments in eSystems Engineering (DeSE) (IEEE) pp 434–9
- [8] Nasr M S, Ali I M, Hussein A M, Shubbar A A, Kareem Q T and AbdulAmeer A T 2020 Utilization of locally produced waste in the production of sustainable mortar *Case Stud. Constr. Mater.* **13** e00464
- [9] Obaid M K, Nasr M S, Ali I M, Shubbar A A and Hashim K S 2021 Performance of Green Mortar Made from Locally Available Waste Tiles and Silica Fume *J. Eng. Sci. Technol. Technol.* **16**
- [10] Hasan Z A, Nasr M S and Abed M K 2021 Properties of reactive powder concrete containing different combinations of fly ash and metakaolin *Mater. Today Proc.* **34**
- [11] Jafer H, Jawad I, Majeed Z and Shubbar A 2021 The development of an ecofriendly binder containing high volume of cement replacement by incorporating two by-product materials for the use in soil stabilization *Sci. Rev. Eng. Environ. Sci.* **30**
- [12] Hasan Z A, Nasr M S and Abed M K 2019 Combined Effect of Silica Fume, and Glass and Ceramic Waste on Properties of High Strength Mortar Reinforced With Hybrid Fibers *Int. Rev. Civ. Eng.* **10** 267–73
- [13] Kubba H Z, Nasr M S, Al-Abdaly N M, Dhahir M K and Najim W N 2020 Influence of Incinerated and Non-Incinerated waste paper on Properties of Cement Mortar *IOP Conference*

- Series: Materials Science and Engineering* vol 671 (IOP Publishing) p 12113
- [14] Shubbar A A, Sadique M, Kot P and Atherton W 2019 Future of clay-based construction materials—A review *Constr. Build. Mater.* **210** 172–87
 - [15] Shubbar A A, Sadique M, Shanbara H K and Hashim K 2020 The Development of a New Low Carbon Binder for Construction as an Alternative to Cement *Advances in Sustainable Construction Materials and Geotechnical Engineering* (Springer) pp 205–13
 - [16] Zainab S A K, Zainab A M, Jafer H, Dulaimi A F and Atherton W 2018 The effect of using fluid catalytic cracking catalyst residue (FC3R) as a cement replacement in soft soil stabilisation" *Int. J. Civ. Eng. Technol.* **9** 522–33
 - [17] Nasr M S, Hussain T H and Najim W N 2018 Properties of Cement Mortar Containing Biomass Bottom Ash and Sanitary Ceramic Wastes as a Partial Replacement of Cement *Int. J. Civ. Eng. Technol.* **9** 153–65
 - [18] Hussain A J and Al-Khafaji Z S 2020 The fields of applying the recycled and used oils by the internal combustion engines for purposes of protecting the environment against pollutions *J. Adv. Res. Dyn. Control Syst.* **12** 698–706
 - [19] Shubbar A A, Sadique M, Nasr M S, Al-Khafaji Z S and Hashim K S 2020 The impact of grinding time on properties of cement mortar incorporated high volume waste paper sludge ash *Karbala Int. J. Mod. Sci.* **6** 396–403
 - [20] Shubbar A A, Jafer H, Abdulredha M, Al-Khafaji Z S, Nasr M S, Al Masoodi Z and Sadique M 2020 Properties of cement mortar incorporated high volume fraction of GGBFS and CKD from 1 day to 550 days *J. Build. Eng.* **30** 101327
 - [21] Nasr M S, Hasan Z A, Abed M K, Dhahir M K, Najim W N, Shubbar A A and Dhahir H Z 2021 Utilization of High Volume Fraction of Binary Combinations of Supplementary Cementitious Materials in the Production of Reactive Powder Concrete *Period. Polytech. Civ. Eng.* **65** 335–43
 - [22] Black L 2016 Low clinker cement as a sustainable construction material *Sustainability of Construction Materials* (Elsevier) pp 415–57
 - [23] Alsalman A, Assi L N, Ghotbi S, Ghahari S and Shubbar A 2020 Users, Planners, and Governments Perspectives: A Public Survey on Autonomous Vehicles Future Advancements *Transp. Eng.*
 - [24] Siddique R 2007 *Waste materials and by-products in concrete* (Springer Science & Business Media)
 - [25] Environmental Protection Agency 1993 *Report to congress on cement kiln dust* (EPA-530-R-94-001, USA)
 - [26] H Hassan I, M Abdul-Kareem O and Yasin Shihab A 2013 Utilization of Cement Kiln Dust (CKD) as a Partial Replacement of Cement in Mortar and Concrete *AL-Rafdain Eng. J.* **21** 72–87
 - [27] BS EN 197-1 2011 *Cement, Composition, Specifications and Conformity Criteria for Common Cements* (London, England: British: British Standards Institution-BSI and CEN European Committee for Standardization)
 - [28] BS EN 196-3 2005 *Methods of testing cement. Determination of setting times and soundness* (British Standards Institution-BSI and CEN European Committee for Standardization)
 - [29] BS EN 196-1 2005 *Methods of testing cement. Determination of strength* (British Standards Institution-BSI and CEN European Committee for Standardization)
 - [30] BS 1881: Part 203 1983 *Recommendations for Measurement of Velocity of Ultrasonic Pulses in Concrete* (British Standards Institution, UK)
 - [31] Shoaib M M, Balaha M M and Abdel-Rahman A G 2000 Influence of cement kiln dust substitution on the mechanical properties of concrete *Cem. Concr. Res.* **30** 371–7
 - [32] BHATTY M S Y 1984 Use of cement-kiln dust in blended cements *World Cem.* **15** 126–32
 - [33] BHATTY M S Y 1985 Use of cement kiln dust in blended cements—alkali-aggregate reaction expansion *World Cem.* **16** 386–92

- [34] Bhatti M S Y 1986 Properties of blended cements made with Portland cement, cement kiln dust, fly ash, and slag *Proceedings of the Imitational Congress on the Chemistry of Cement* pp 118–27
- [35] Shubbar A A, Al-Khafaji Z S, Nasr M S and Falah M W 2020 Using Non-Destructive Tests for Evaluating Flyover Footbridge: Case Study *Knowledge-Based Eng. Sci.* **1** 23–39
- [36] Majdi H S, Shubbar A A, Nasr M S, Al-Khafaji Z S, Jafer H, Abdulredha M, Masoodi Z Al, Sadique M and Hashim K 2020 Experimental data on compressive strength and ultrasonic pulse velocity properties of sustainable mortar made with high content of GGBFS and CKD combinations *Data Br.* **31** 105961
- [37] Al Hawesah H, Shubbar A and Al Mufti R L 2018 Non-destructive assessment of early age mortar containing stainless steel powder *Proceedings of the LJMU 17th Annual International Conference on: Asphalt, Pavement Engineering and Infrastructure* (Liverpool, UK: LIVERPOOL CENTRE FOR MATERIALS TECHNOLOGY)
- [38] Shanbara H K, Ruddock F and Atherton W 2017 Improving the Mechanical Properties of Cold Mix Asphalt Mixtures Reinforced by Natural and Synthetic Fibers *International Conference on Highway Pavements & airfield Technology* pp 102–11
- [39] Ali I M, Naje A S and Nasr M S 2020 Eco-Friendly Chopped Tire Rubber as Reinforcements in Fly Ash Based Geopolymer Concrete *Glob. NEST J.* **22** 342–7
- [40] Al-Salim N H A, Hassan R F and Jaber M H 2018 Compression Zone Rehabilitation of Damaged RC Beams Using Poleyster Glue Line *J. Eng. Appl. Sci.* **13** 1195–200
- [41] Hassan R F, Jaber M H, Al-Salim N H and Hussein H H 2020 Experimental research on torsional strength of synthetic/steel fiber-reinforced hollow concrete beam *Eng. Struct.* **220** 110948
- [42] Jaber M H, Al-Salim N H A and Hassan R F 2018 flexural behavior of hollow rectangular steel (HRS) section beams filled with reactive powder concrete *Technology* **9** 1177–87
- [43] Hassan R F, Al-Salim N H A and Jaber M H 2018 Effect of Polyvinyl Alcohol on flexural behavior of RC Bubble slabs under linear load *J. Eng. Appl. Sci.* **13** 3979–84
- [44] Ali I M, Nasr M S and Naje A S 2020 Enhancement of cured cement using environmental waste: particleboards incorporating nano slag *Open Eng.* **10** 273–81
- [45] Abed M, Nasr M and Hasan Z 2018 Effect of silica fume/binder ratio on compressive strength development of reactive powder concrete under two curing systems *MATEC Web of Conferences* vol 162 (EDP Sciences) p 02022
- [46] Nasr M S, Salih S A and Hassan M S 2016 Some Durability Characteristics of Micro Silica and Nano Silica Contained Concrete *J. Babylon Univ. Sci.* **24** 980–90
- [47] Nayel I H, Burhan S K and Nasr M S 2018 Characterisation of prepared rice husk ash and its effects on strength development in recycled aggregate concrete *IOP Conference Series: Materials Science and Engineering* vol 433 (IOP Publishing) p 12009
- [48] Shanbara H K, Shubbar A, Ruddock F and Atherton W 2020 Characterizing the Rutting Behaviour of Reinforced Cold Mix Asphalt with Natural and Synthetic Fibres Using Finite Element Analysis *Advances in Structural Engineering and Rehabilitation* (Springer) pp 221–7
- [49] Al Khafaji Z S and Ruddock F 2018 Study the retardant effect of using different sugar's types on setting time and temperature of cement paste *Int. J. Civ. Eng. Technol.* **9** 519–30
- [50] Shubbar A A F, Alwan H, Phur E Y, McLoughlin J and Al-khaykan A 2017 Studying the Structural Behaviour of RC Beams with Circular Openings of Different Sizes and Locations Using FE Method *Int. J. Civil, Environ. Struct. Constr. Archit. Eng.* **11** 849–52
- [51] Shubbar A A F, Atherton W, Jafer H M, Dulaimi A F and Al-Faluji D 2017 The Development of a New Cementitious Material Produced from Cement and GGBS *The 3rd BUiD Doctoral Research Conference-Faculty of engineering and IT (BUiD)* pp 51–63
- [52] Nasr M S, Hussain T H, Kubba H Z and Shubbar A A 2020 Influence of using high volume fraction of silica fume on mechanical and durability properties of cement mortar *J. Eng. Sci. Technol.* **15** 2492–506

- [53] Hussain T H, Nasr M S and Salman H J 2019 Effect of elevated temperature on degradation behavior of reactive powder concrete made with rubber tire wastes as an aggregate replacement *ARPN J. Eng. Appl. Sci.* **14** 775–80
- [54] Nasr M S, Salih S A and Hassan M S 2016 Pozzolanic Activity and Compressive Strength of Concrete Incorporated nano/micro Silica *Eng. Technol. J.* **34** 483–96
- [55] Hasan Z A, Abed M K and Nasr M S 2019 Studying the Mechanical Properties of Mortar Containing Different Waste Materials as a Partial Replacement for Aggregate *Int. Rev. Civ. Eng.* **10** 155–61
- [56] Al-Rifaie A, Al-Husainy A S and Shanbara H K 2020 Numerical study on the behaviour of end-plate beam-to-column connections under lateral impact loading *Int. J. Struct. Eng.* **10** 150–73
- [57] Nayel I H, Nasr M S and Abdulridha S Q 2020 Impact of elevated temperature on the mechanical properties of cement mortar reinforced with rope waste fibres *IOP Conference Series: Materials Science and Engineering* vol 671 (IOP Publishing) p 12080
- [58] Al-Khafaji Z S and Falah M W 2020 Applications of high density concrete in preventing the impact of radiation on human health *J Adv Res Dyn Control Syst* **12** 666–70
- [59] Abdulredha M, Abdulridha A, Shubbar A A, Alkhaddar R, Kot P and Jordan D 2020 Estimating municipal solid waste generation from service processions during the Ashura religious event *IOP Conference Series: Materials Science and Engineering* vol 671 (IOP Publishing) p 12075
- [60] Abdulraheem F S, Al-Khafaji Z S, Hashim K S, Muradov M, Kot P and Shubbar A A 2020 Natural filtration unit for removal of heavy metals from water *IOP Conference Series: Materials Science and Engineering* vol 888 (IOP Publishing) p 12034
- [61] Mohammed A-H, Hussein A H, Yeboah D, Al Khaddar R, Abdulhadi B, Shubbar A A and Hashim K S 2020 Electrochemical removal of nitrate from wastewater *IOP Conference Series: Materials Science and Engineering* vol 888 (IOP Publishing) p 12037
- [62] Alenezi A K, Hasan H A, Hashim K S, Amoako-Attah J, Gkantou M, Muradov M, Kot P and Abdulhadi B 2020 Zeolite-assisted electrocoagulation for remediation of phosphate from calcium-phosphate solution *IOP Conference Series: Materials Science and Engineering* vol 888 (IOP Publishing) p 12031
- [63] Al-Marri S, AlQuzweeni S S, Hashim K S, AlKhaddar R, Kot P, AlKizwini R S, Zubaidi S L and Al-Khafaji Z S 2020 Ultrasonic-Electrocoagulation method for nitrate removal from water *IOP Conference Series: Materials Science and Engineering* vol 888 (IOP Publishing) p 12073
- [64] Jabbar D N, Al-Rifaie A, Hussein A M, Shubbar A A, Nasr M S and Al-Khafaji Z S 2021 Shear behaviour of reinforced concrete beams with small web openings *Mater. Today Proc.* **34**