



LJMU Research Online

Yang, P, Shehab, A, Elhoseny, M, Muhammad, K, Sangaiah, A, Huang, H and Hou, G

Tamper Localization and Self-Recovery Scheme for Medical Image Analysis Using SVD-based Fragile Watermarking

<http://researchonline.ljmu.ac.uk/7856/>

Article

Citation (please note it is advisable to refer to the publisher's version if you intend to cite from this work)

Yang, P, Shehab, A, Elhoseny, M, Muhammad, K, Sangaiah, A, Huang, H and Hou, G Tamper Localization and Self-Recovery Scheme for Medical Image Analysis Using SVD-based Fragile Watermarking. IEEE Access. ISSN 2169-3536 (Accepted)

LJMU has developed **LJMU Research Online** for users to access the research output of the University more effectively. Copyright © and Moral Rights for the papers on this site are retained by the individual authors and/or other copyright owners. Users may download and/or print one copy of any article(s) in LJMU Research Online to facilitate their private study or for non-commercial research. You may not engage in further distribution of the material or use it for any profit-making activities or any commercial gain.

The version presented here may differ from the published version or from the version of the record. Please see the repository URL above for details on accessing the published version and note that access may require a subscription.

For more information please contact researchonline@ljmu.ac.uk

<http://researchonline.ljmu.ac.uk/>

Tamper Localization and Self-Recovery Scheme for Medical Image Analysis Using SVD-based Fragile Watermarking

¹Abdulaziz Shehab, ¹Mohamed Elhoseny, ²Khan Muhammad, ³Arun Kumar Sangaiah, ⁴Po Yang, ⁵Haojun Huang, ⁶Guolin Hou*

¹Faculty of Computers and Information, Mansoura University, Egypt

²Intelligent Media Laboratory, Digital Contents Research Institute, Sejong University, Seoul, Republic of Korea

³School of Computing Science and Engineering, VIT University, Vellore, India

⁴Department of Computer Science, Liverpool John Moores University, Liverpool, UK

⁵School of Electronic Information, Wuhan University, Wuhan, People's Republic of China

⁶Science and Technology on Near-surface Detection Laboratory, Wuxi, People's Republic of China

Corresponding Author: Guolin Hou (honeyline@126.com)

Abstract- Over the past decade advances in computer-based communication and health services, the need for image security becomes urgent to address the requirements of both safety and non-safety in medical applications. This paper proposes a new fragile watermarking based scheme for image authentication and self-recovery for medical applications. The proposed scheme locates image tampering as well as recovers the original image. A host image is broken into 4×4 blocks and Singular Value Decomposition (SVD) is applied by inserting the traces of block wise SVD into the Least Significant Bit (LSB) of the image pixels to figure out the transformation in the original image. Two authentication bits namely block authentication and self-recovery bits were used to survive the vector quantization attack. The insertion of self-recovery bits is determined with Arnold transformation, which recovers the original image even after a high tampering rate. SVD-based watermarking information improves the image authentication and provides a way to detect different attacked area. The proposed scheme is tested against different types of attacks such as text removal attack, text insertion attack, and copy and paste attack.

Keywords: Medical Image Security, Tamper localization, Singular Value Decomposition, Fragile Watermarking, Arnold Transformation, Image security, Authentication.

1 Introduction

With the development of computer-based communication in health services applications, the need for medical image security is urgent to protect the patients' sensitive data. Medical image analysis aims to solve medical problems using different imaging modalities and digital image analysis techniques. Images are easily manipulated using image processing tools, which have serious consequence [1]. Hence, protecting the credibility and respectability of medical images is of a significant importance [2], [3]. There are two main types of image verification strategy, cryptography based techniques [4], [5] and fragile watermarking based techniques [6]–[8]. A message authentication code (MAC) is computed in the cryptography based techniques, which utilizes a hash function to calculate the same code. Such MAC codes can decide whether an image tampering occurred without the ability to determine its region [9]. Fragile watermark is inserted in the image, which needs to be protected from the unauthorized access. To ensure the validity of a watermarked image, the fragile watermark needs to be produced using features of the host image or using pseudo deterministic random information of the host. Some fragile watermarking based schemes can only sense the tampered host images and not able to self-recover the original host image [10], [27]. The first known fragile watermarking schema was proposed by Walton [11], which calculates the

check sum of the first seven most significant bits (MSB). It provides limited alter recognition [12]. Yeung and Mintzer [6] implemented a watermarking method centered on pseudo-random sequence generation. In this method, a fragile watermark is implanted into the original host image by the help of modified error diffusion. It suffers from fake image generation using a look up table [13].

This problem occurs because of the block independent nature of image watermarking. The watermarking that does not involve any blocks dependency can simply be damaged with specialized attacks such as Vector Quantization (VQ) attack [14]. The invader deduces the forged image with the aid of quantization code-book in VQ attack. This code book is created from a set of watermarked images. As each block validates itself only, the forged image seems to be true. To overcome VQ attack, [12, 15] suggested the inclusion of chaotic pattern in the watermarking design, which later helps to trace the tampered region in the watermarked host image. A difference image is mapped to binary watermark image and is inserted into the host image using its LSB. Interfered pixels can still be recognized because they do not convey the watermark information. Since some information generated from the new pixel values may coincide with the watermark change into, these pixels cannot be noticed easily. In such case, the localization and finding of tampered pixels cannot be done precisely [16]. Dhole et al.

[17] proposed a self-embedding watermark schema from tamper recovery, which provides a good tamper localization but it was unable to deal with the VQ attack. Patra et al. [18] proposed a fragile watermarking method based on the Chinese remainder theorem (CRT). The main advantage of these methods was improved computational complexity. A block size of 8×8 is usually used to provide the tamper localization. It provides a poor accuracy for tamper localization because of the large block size. The recovered image shows a decent image quality (36.77 dB) after a minor tampering rate. SVD demonstrates the basic

building of matrix along with its algebraic essence, which makes it useful in many of applications such as image watermarking, image compression, voice recognition, etc. There are many watermarking methods developed, which employ SVD [19-21]. Sun et.al [22] proposed a SVD based approach in the class of semi fragile watermarking. In this scheme, the watermark is implanted in the host image by calculating SVD and then quantizing the Singular Value of each image block. It provides no self-recovery feature. Table 1 gives a summary of recent works.

Table 1. Summary of popular and recent image analysis watermarking work

Paper	Block Size	Methodology	Tamper Detection Accuracy (%)	Recovered PSNR (dB)	Main Limitation
Walton [11]	N/A	LSB insertion	Very limited (10%)	N/A	One single LSB change can be detected
Yeung and Mintzer [6]	4×4	Chaotic pattern	70%	N/A	Not able to sustain VQ attack
Shao-Hui Liu et al [12]	4×4	Chaotic pattern	85%	N/A	No self-recovery
Sanjay Rawat et al.[15]	4×4	Advance level of chaotic pattern	98%	N/A	No self-recovery
Patra et al. [18]	8×8	Chinese remainder theorem	93%	36dB	Low tamper localization
Dhole et al [17]	4×4	Mean value of block	98%	34dB	Low self-recovery

This paper proposes a SVD-based fragile watermarking scheme for tamper localization and self-recovery to protect the sensitive images in medical applications. Two codes are used, one code contains the average value of the block information itself whereas the second contains block authentication information. To find out the embedding position, Arnold transform has been utilized. This helps to hide the neighboring pixel information at a distant location and provide better self-recovery. The proposed scheme aims to localize the attacked pixels/region. The main contribution here is that Arnold provides a more reliable and secure way for hiding image information. Moreover, PSNR ratio could be improved through the neighborhood block based recovery which relies on the fact that neighborhood blocks of a pixel contain mostly similar information. Hence, randomize insertion of neighborhood block enhance the recovery chance of approximate value for pixels gets lost or changed by the attacker.

The rest of paper is organized as follow: Section 2 gives a detailed description of our proposed watermarking scheme. Section 3 discusses the results. Section 4 presents the conclusion of our work.

2 Proposed Method

SVD can directly performed on digital images as they are nothing but a representation (matrix form) of the non-negative scalars numbers. SVD [23], [28], [29] is a method of Mathematics (Linear Algebra). SVD is used to diagonalize any given symmetric image (matrix) in order to obtain three new matrices: U , S and V , which are known by the name of singular matrix (left), singular matrix (right) and Singular matrix respectively. The same can be expressed in mathematical form as:

$$A = USV^T \quad (1)$$

SVD decompose, the original matrix A in to three matrices: U , S and V .

Matrix S follows few properties like it remains a rectangular diagonal matrix and the diagonal elements of singular matrix are kept on descending order. These diagonal elements of singular matrix are known as singular values. If host image matrix 'A' has a size of $n \times n$ then decomposed singular matrix S contains maximum n

elements diagonally. These singular values contain the information about the participation of each layer in the final host image formation. The values of the singular elements show quite a robust nature towards intentional/unintentional attacks on host image so this property can be used to check the originality of host image. If we use lesser elements of matrix S in the regeneration process of matrix A then the image quality of regenerated image will get affected.

The left and right singular matrices follow the property $UU^T = I_n$ and $VV^T = I_n$. The singular values of diagonal matrix S follows the property.

$$s_1 \geq s_2 \dots s_r > s_{r+1} > s_{r+2} \dots > s_n = 0 \quad (2)$$

Here, $(r \leq n)$ is showing the rank of the singular matrix S and $s_1, s_2 \dots s_n$ are singular values of matrix S .

To ensure the security of the host image blocks as well as provide self-recovery ability to the proposed scheme, the blocks need to be randomized in such fashion that it can only be reversed back by the unique key/code. Arnold transform is computed as follows:

$$\begin{bmatrix} x_i \\ y_i \end{bmatrix} = \begin{bmatrix} 1 & a \\ b & ab + 1 \end{bmatrix} \begin{bmatrix} x_{i-1} \\ y_{i-1} \end{bmatrix} \text{ mod } (h) \quad (3)$$

where a and b are positive constant, which is used to determine the period of a given matrix. h is the size of the host image (Here we are considering a square image). x_i and y_i denotes the transformed value of x and y pixels after i^{th} number of iterations. The mathematical expression shown in Eqs (3) is periodic in nature (i.e. if we keep on transforming x and y elements then after a fixed numbers of repetitions ' T ' the x and y elements repeat itself/original values). T is known as time period of iteration and this time period T remain dependent on a , b and i . so these variables used to determine the key of the randomization process.

Let's suppose that ' i ' transforms are followed during the element randomization stage. Then, to retrieve back the original host image, again $(T-i)$ transforms needs to be applied on this pre-randomized image. As mentioned earlier, if we scramble the information throughout the image with the help of Arnold transformation and then perform a tampering of any type, the chances are quite high that some information will still remain undamaged.

To provide tamper localization in a host image and to recover the tampered region, the inserted watermark bits are made up of two different types:

1. Block authentication bits: The main idea behind the block authentication bits calculation is to authenticate each block separately. To achieve that purpose, host image is divided into 4×4 blocks and

SVD is computed for each block. Then, traces of singular matrices are used as block authentication bit for each block.

2. Self-Recovery bits: The average values of the first 5 MSB are used as the self-recovery information for each 2×2 .

This average helps us to recover the approximation of the original image in case it gets tampered. Another important aspect of proposed work is the use of randomized insertion of watermark information to improve the performance of the scheme. In order to provide a better self-recovery, Arnold transformation is used in present study so that neighborhood recovery information can be saved at distant locations. For each image block, these two types of bits (authentication and self-recovery) are hidden in the LSB of the block pixels. The positions used for insertion, are determined by the help of Arnold Transform, which is generated using a secret key and that key is only known to the owner of the image. If that key is changed, all the watermark bits can't be correctly extracted from the image block. Arnold transform provides an alternative way to recover the image data from the neighboring blocks when main information gets lost. So the use of Arnold Transform not only improves the security but also improves the performance of the proposed scheme. After that, the watermarked medical images are tested against various types of attacks to figure out its usefulness and efficiency.

2.1 Watermark Embedding Process

The diagram of our proposed method is shown in Figure 1. The host image is divided into small blocks of size 4×4 and the LSB of all these blocks are set as zero. This division guides us to calculate the tamper localization information for each block separately by the help of SVD operation on each 4×4 blocks. After SVD is computed for each block, the corresponding traces are also calculated. These calculated traces work as the Block Authentication Number (BAN) and used to authenticate each block. The traces are mapped to the range of $[0, 4095]$ in order to restrict the number of bits as 12, used for the traces representation of each block. Further, block wise Arnold scrambling is performed and 4×4 blocks are again decomposed into 2×2 blocks as shown in figure 2 (a) so that neighborhood block is recovered. The self-recovery information is calculated with the help of the average value of these 2×2 blocks as shown in figure 2 (b). The obtained BAN and average value of Arnold scrambled 4×4 blocks are combined with each other with the help of a secret key in order to generate the complete watermark information. This complete watermark is inserted into the host image by replacing the last two LSBs of each 4×4 block (32 bits) with the generated watermark information of each 4×4 block.

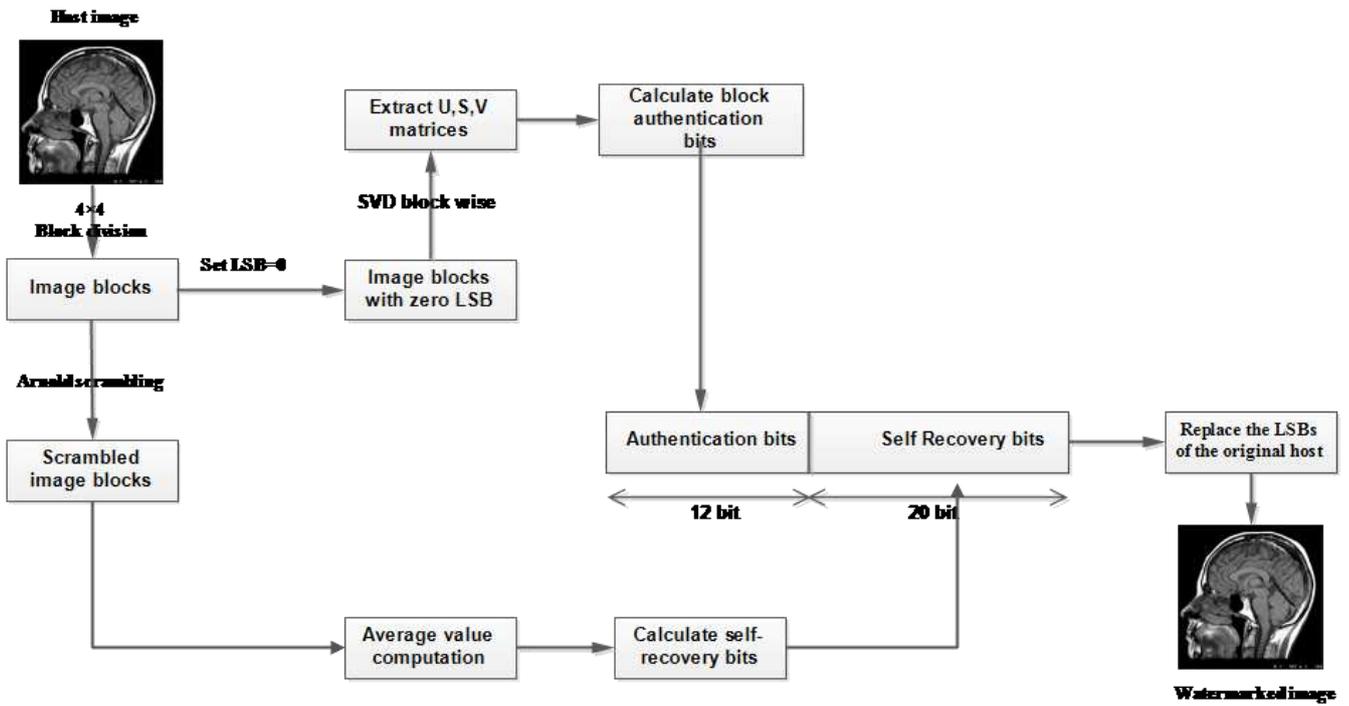


Figure 1. Block representation of watermark embedding method

The last 2 LSB of each pixel i.e. $16 \times 2 = 32$ are replaced by the watermark.

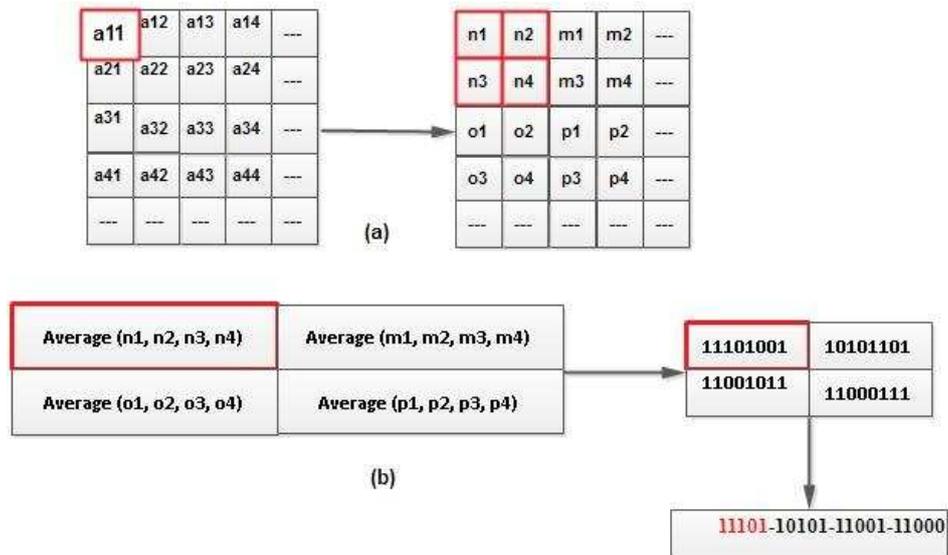


Figure 2. (a) Block division of 4×4 block (a11-a44) into 2×2 blocks (n1-n4, m1-m4, o1-o4, p1-p4) and (b) average value computation from 5 MSB

2.2 Watermark Extraction process

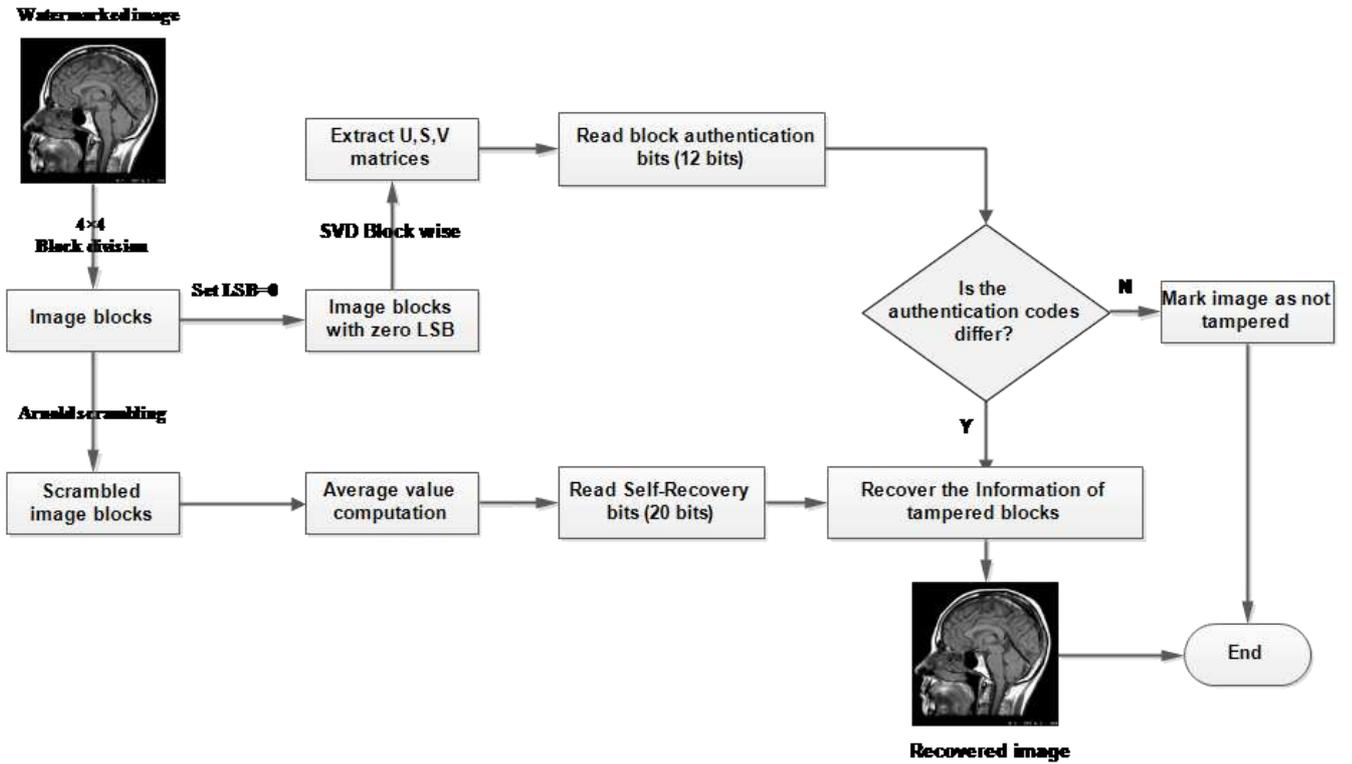


Figure 3. Block representation of tamper localization along with self-recovery using the extracted watermark

The extraction process is quite similar to that of embedding process. The block diagram of complete extraction process is shown in figure 3. Here are the details of step involved:

Firstly, the watermarked image is divided into small blocks of size 4×4 . As the LSB contained the watermarked information so it is separated out from the watermarked image and then LSB is set as zero in order to re-calculate the Block Authentication Bits (12 bits). Then, BAN is calculated in the same way as calculated in embedding process. After that block based scrambling is performed on this watermarked image with the same key as used during embedding process. The average value and self-recovery information is calculated in the same way as it is done in embedding.

The calculated BAN and LSB extracted BAN are compared with other for each block along with the average information too. The blocks having same authentication bits are marked as not-tampered and rest are marked as tampered. Then, the tampered blocks information is recovered with the help of extracted self-recovery information from the extracted LSB data from watermarked image and finally the neighborhood block based recovery is performed in order to improve the self-recovery even further. This helps us to achieve the improved self-recovery because of the fact that neighborhood blocks of any image's pixels contain almost similar information.

3 Results and discussions

3.1 Experimental metrics

In order to figure out the effectiveness of the proposed scheme, five different factors are calculated, which are defined as follows:

1) False positive rate (FPR): error in classifying non-tampered pixels as tampered ones. Mathematically defined as:

$$FPR = \frac{\text{False classified pixels}}{\text{Total tampered pixels}} \times 100 \quad (4)$$

2) False negative rate (FNR): error in classifying tampered pixels as non-tampered ones. Mathematically defined as:

$$FNR = \frac{\text{False classified pixels}}{\text{Total non-tampered pixels}} \times 100 \quad (5)$$

3) Tamper detection rate (TDR): The detection rate of tampered pixels in the overall tampered area. Mathematically defined as:

$$\text{TDR} = \frac{\text{Detected tampered pixels}}{\text{Total no.of tampered pixels}} \times 100 \quad (6)$$

It also called tamper localization accuracy.

4) Peak signal to noise ratio (PSNR): is used to measure the accuracy of recovered image compared with the original image. it is used to describe the image quality. Mathematically defined as:

$$\text{PSNR} = 10 \log_{10} \left(\frac{n \times n \times (X_{\max})^2}{\sum_{i=1}^n \sum_{j=1}^n (X(i,j) - X^*(i,j))^2} \right) \quad (7)$$

Where $n \times n$ represent the size of host image, $X(i, j)$ is pixel of first image, $X^*(i, j)$ is pixel of second image and X_{\max} is maximum allowed pixel intensity.

5) The normalized cross-correlation (NCC): check the similarity between two images. Mathematically defined as:

$$\text{NCC}(X, Y^*) = \frac{\sum_{i=1}^n \sum_{j=1}^n \overline{X(i,j)} \oplus \overline{Y^*(i,j)}}{n \times n} \quad (8)$$

Here X and Y represent two matrices, whose similarity need to be checked and \oplus represents the XOR operation. $n \times n$ is the block size.

3.2 Experiment assumption

In our experiments, 12 gray scale medical images were used. The sizes of these images are 512×512 . Figure 4 shows a sample of host images for brain, kidney, and liver used in this study. The watermark is generated from the host itself and inserted into the LSBs. The parameters for Arnold transform include $m=1$, $n=1$ and $i=30$.

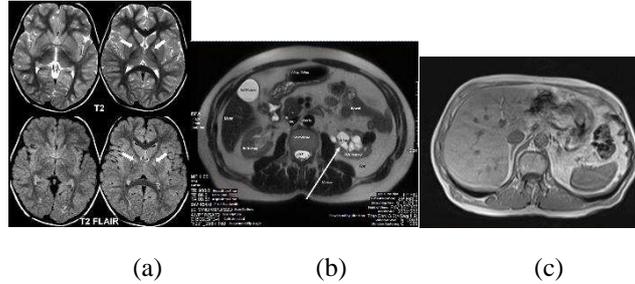



Figure 4. Sample host images: (a) Brain (b) Kidney and (c) Liver

3.3 Copy and paste attack

Watermarked medical images are subject to different attacks. Two types of copy and paste attack has been performed over the watermarked medical images. In first type, the copy and paste done on the same watermarked image. In 'brain' image, for example extra left ventricle in the brain has been copy and paste. In 'kidney' image, the outer tissue of left kidney has been copied from the left side to right side. In 'liver' image, cross-sectional area

from the bottom has been copied to upper right corner. Figure 5 shows the results, which include images of tampered host, tamper localization and self-recovered image the PSNR values of all watermarked images lies in the range of 50.17dB and 51.25dB.

In the second attack, we copy some portion from liver to the brain watermarked image and vice versa. Figure 6 shows the results.

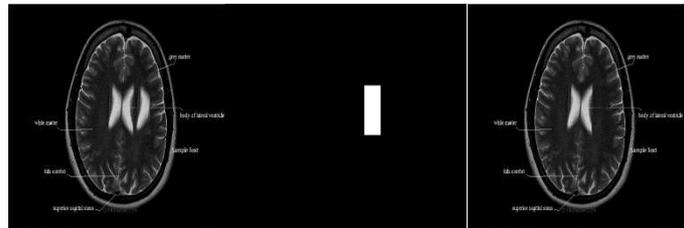

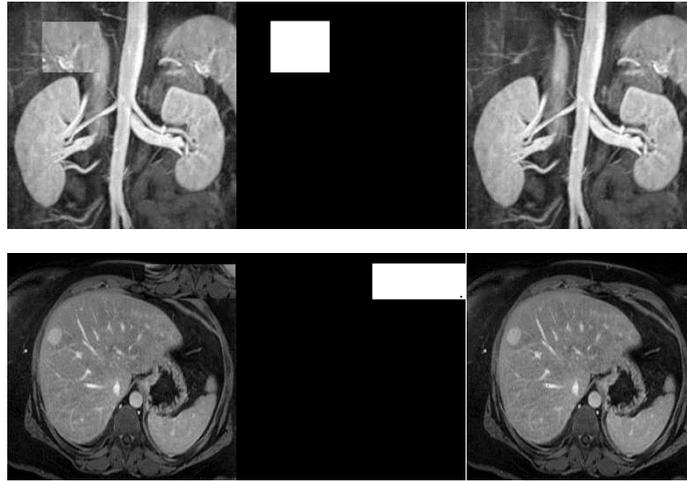


Figure 5. Result of copy and paste attack – Type 1: Attacked watermarked images (rightmost), localization of tamper (center), self-recovered host (leftmost)

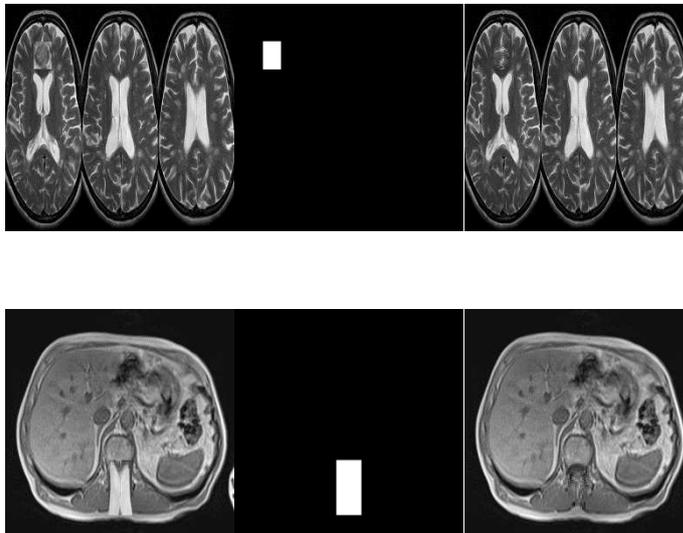


Figure 6. Result of copy paste attack – Type 2: Attacked watermarked Images (rightmost), localization of attack (center), self-recovered host (leftmost)



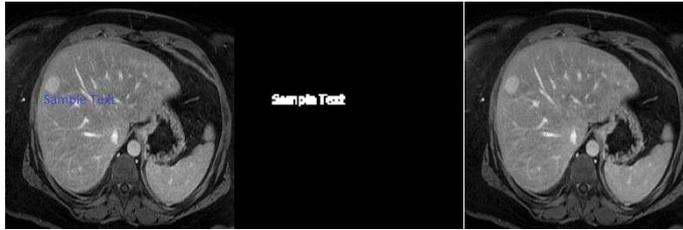
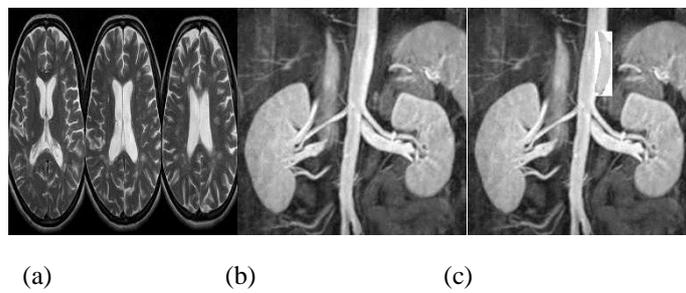


Figure 7. Result of text addition: Attacked watermarked Images (rightmost), localization of attack (center), self-recovered host (leftmost)



Figure 8. Result of content removal: Attacked Watermarked Images (rightmost), localization of attack (center), self-recovered host (leftmost)



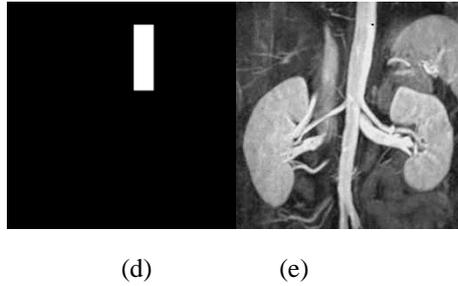


Figure 9. Result of VQ attack: (a) Lena (b) Girl (c) VQ attacked Image (d) localization of attack and (e) self-recovered host

3.4 Text Addition

In this attack, addition of text “Sample Text” has been done in different colors, location, and font sizes in brain, kidney, and liver host images. The result of text addition attack is shown figure 7.

3.5 Content removal

In this type of attack, some content has been removed from watermarked medical images with no degradation of the image quality. The result of content removal attack is shown figure 8.

3.6 VQ attack

To verify the working of proposed scheme with VQ attack, a forged image is designed by adding different parts of several watermarked images (watermarked with same method). During this construction, the relative spatial position of watermarked images is not important because all the blocks will get authenticated individually. A new host image for the brain has been taken in this experiment as shown in figure 9. The sizes of host images are 512×512 and the watermarked images have a PSNR as 50.97 dB and 51.03 dB respectively for ‘brain’ and ‘kidney’. The result of VQ attack is shown figure 9.

3.7 A Comparison Study

A comparison with existing methods is presented in Table 2 in terms of both tamper localization accuracy and the PSNR of self-recovered image.

Patra et al [18]	Proposed Scheme	
	Tamper Localization (%)	Recovered PSNR (dB)
Recovered PSNR (dB)	Tamper Localization (%)	Recovered PSNR (dB)
36.12	99.56	38.96
35.98	99.34	37.95
36.02	99.26	38.54
36.15	99.46	38.56
36.29	99.49	38.25
36.54	99.17	38.15
30.54	99.11	33.49
36.24	99.54	38.56
12.56	99.02	30.25
0		

Type of Attack	Host images	Preda et al [25]		El'arbi et al [26]		Dhole et al [17]	
		Tamper Localization (%)	Recovered PSNR	Tamper Localization (%)	Recovered PSNR	Tamper Localization (%)	Recovered PSNR (dB)
Copy and paste	Plane	99.45	28.56	94.52	34.56	98.56	34.36
	Classic	99.65	27.54	94.24	36.69	97.34	34.55
Copy and paste	Barbara	98.65	28.69	94.36	35.41	96.26	34.65
	Classic	99.59	27.56	94.56	35.43	97.46	35.12
Text addition	Barbara	98.64	28.78	93.74	36.48	98.49	34.51
	Camerama	99.56	25.56	92.69	35.56	98.17	34.25
Content removal	Lena	98.68	24.56	93.36	31.48	97.57	32.28
	Barbara	98.56	28.56	95.48	35.13	98.26	38.56
VQ	Lena+ Girl	99.56	28.54	91.25	29.16	0	12.56

Table 3. The obtained FPR, FNR, and NCC values according to different attacks

Type of Attacks	Host images	FPR	FNR	NCC ₁	NCC ₂
Copy and paste-Type1	Brain	0.41	0.008	0.9998	0.9982
	Kidney	0.35	0.007	0.9999	0.9980
	Liver	0.45	0.06	0.9998	0.9978
Copy and paste-Type2	Brain	0.39	0.008	0.9997	0.9982
	Kidney	0.36	0.008	0.9998	0.9984
	Liver	0.38	0.006	0.9996	0.9985
Text addition	Brain	0.31	0.007	0.9997	0.9983
	Kidney	0.42	0.008	0.9998	0.9982
	Liver	0.42	0.008	0.9998	0.9982
Content removal	Brain	0.51	0.01	0.9998	0.9978
	Kidney	0.38	0.008	0.9999	0.9982
	Liver	0.48	0.009	0.9996	0.9978
VQ	Brain+ Kidney	0.89	0.03	0.9997	0.9961

Table 3 summarizes the evaluation based on FPR, FNR and NCC (watermarked medical image) and NCC (recovered image) corresponding to different attacks. The FNR and FPR of the proposed scheme are quite low and pretty acceptable as we can see from Table 3. Even in case of vector quantization attack too, which indicates that our scheme is more efficient and accurate for practical usage. The NCC of the watermarked image (NCC₁) is very close to one, which indicates that the difference between watermarked image and original host image is quite small. Moreover, the NCC value of recovered host image (NCC₂) is also close to one, which indicates a reliable recovery of tampered host. Overall, the proposed scheme demonstrates a robust and satisfactory performance.

4 Conclusion

This paper presents a SVD based fragile watermarking scheme, which used grouped block method to offer more security and provide, supplementary way to locate the attacked area inside different medical images. Two authentication bits namely block authentication and self-recovery bits were used to survive the vector quantization attack. The usage of Arnold transform makes it possible to recover the tampered region from the neighboring blocks, which ultimately increases the NCC and PSNR of the recovered host. Our experimental results showed that proposed scheme is highly reliable and is able to locate the attacked blocks efficiently. The proposed schema effectively prevents copy and paste attack, content removal attack, text addition attack and VQ attack. Compared to the state-of-the art methods, the proposed schema greatly improves both tamper localization accuracy and the PSNR of self-recovered image. Although our schema achieved a great performance in handling fragile tampered images, the additional experiments are required to evaluate its efficiency with non-fragile tampered images. Our future work aims at considering this issue. It will focus on detecting other tampering issues such as image resize, skew, and rotate operations.

5 Acknowledgement

Add your acknowledgement here please.

References

- [1] Ahmad, J., Muhammad, K., Lee, M.Y. et al. Endoscopic Image Classification and Retrieval using Clustered Convolutional Features, *Journal of Medical Systems* 41: 196, 2017. <https://doi.org/10.1007/s10916-017-0836-y>
- [2] Jan, Z., Khan, A., Sajjad, M. et al. A review on automated diagnosis of malaria parasite in microscopic blood smears images, *Multimedia Tools and Applications*, 2017: 1–26. <https://doi.org/10.1007/s11042-017-4495-2>
- [3] Khan Muhammad, Muhammad Sajjad, Irfan Mehmood, Seungmin Rho, Sung Wook Baik, Image steganography using uncorrelated color space and its application for security of visual contents in online social networks, In *Future Generation Computer Systems*, 2016 <https://doi.org/10.1016/j.future.2016.11.029>.
- [4] TOSHIHIKO MATSUO AND KAORU KUROSAWA. On parallel hash functions based on block-ciphers. *IEICE TRANSACTIONS on Fundamentals of Electronics, Communications and Computer Sciences*, 87(1):67–74, 2004.
- [5] NINGHUI LI, WENLIANG DU, AND DAN BONEH. Oblivious signature-based envelope. *Distributed Computing*, 17(4):293–302, 2005.
- [6] MINERVA M YEUNG AND FRED MINTZER. An invisible watermarking technique for image verification. In *Image Processing, 1997. Proceedings, International Conference on*, volume 2, pages 680–683. IEEE, 1997.
- [7] PING WAH WONG AND NASIR MEMON. Secret and public key image water- marking schemes for image authentication and ownership verification. *Image Processing, IEEE Transactions on*, 10(10):1593–1601, 2001.
- [8] SHAN SUTHAHARAN. Fragile image watermarking using a gradient image for

- improved localization and security. *Pattern Recognition Letters*, 25(16):1893–1903, 2004.
- [9] CHUN-SHIEN LU AND H-YM LIAO. Structural digital signature for image authentication: an incidental distortion resistant scheme. *Multimedia, IEEE Transactions on*, 5(2):161–173, 2003.
- [10] YU-CHEN HU, CHUN-CHI LO, CHANG-MING WU, WU-LIN CHEN, AND CHIA-HSIEN WEN. Probability-based tamper detection scheme for btc- compressed images based on quantization levels modification. *International Journal of Security and Its Applications*, 7(3):11–32, 2013.
- [11] S. WALTON. Information authentication for a slippery new age. 1995.
- [12] SHAO-HUI LIU, HONG-XUN YAO, WEN GAO, AND YONG-LIANG LIU. An image fragile watermark scheme based on chaotic image pattern and pixel-pairs. *Applied Mathematics and Computation*, 185(2):869–882, 2007.
- [13] N MEMON, S SHENDE, AND PING WAH WONG. On the security of the yeung-mintzer authentication watermark. In *IS AND TS PICS CONFERENCE*, pages 301–306. SOCIETY FOR IMAGING SCIENCE & TECHNOLOGY, 1999.
- [14] MATTHEW HOLLIMAN AND NASIR MEMON. Counterfeiting attacks on oblivious block-wise independent invisible watermarking schemes. *Image Processing, IEEE Transactions on*, 9(3):432–441, 2000.
- [15] SANJAY RAWAT AND BALASUBRAMANIAN RAMAN. A chaotic system based fragile watermarking scheme for image tamper detection. *International Journal of Electronics and Communications*, 65:840–847, 2011.
- [16] XINPENG ZHANG AND SHUOZHONG WANG. Statistical Fragile Watermarking Capable of Locating Individual Tampered Pixels. *IEEE Signal Processing Letters*, 14:727–730, 2007.
- [17] DHOLE, VINAYAK S., AND NITIN N. PATIL. Self Embedding Fragile Watermarking for Image Tampering Detection and Image Recovery Using Self Recovery Blocks. In *Computing Communication Control and Automation (ICCUBEA)*, 2015 International Conference on, pp. 752–757. IEEE, 2015.
- [18] B. PATRA, J. C. PATRA. "Crt-based fragile self-recovery watermarking scheme for image authentication and recovery", in: *IEEE International Symposium on Intelligent Signal Processing and Communication Systems (ISPACS2012)*, pp.430–435.
- [19] CHIH-CHIN LAI. A digital watermarking scheme based on singular value decomposition and tiny genetic algorithm. *Digital Signal Processing*, 21(4):522–527, 2011.
- [20] ANSARI, I.A., PANT, A., AHN, C.W. Robust and false positive free watermarking in IWT domain using SVD and ABC. *Engineering Applications of Artificial Intelligence*. 49, 114-125 (2016).
- [21] RUIZHEN LIU AND TIENIU TAN. An SVD-based watermarking scheme for protecting rightful ownership. *IEEE Transactions on Multimedia*, 4:121–128, 2002.
- [22] RUI SUN, HONG SUN, AND TIANREN YAO. "A svd-and quantization based semi-fragile watermarking technique for image authentication". In *Signal Processing, 2002 6th International Conference on*, volume 2, pages 1592–1595. IEEE, 2002.
- [23] VAN LOAN, CHARLES F. "Generalizing the singular value decomposition." *SIAM Journal on Numerical Analysis* 13.1 (1976): 76-83.
- [24] WU, LINGLING, JIANWEI ZHANG, WEITAO DENG, AND DONGYAN HE. "Arnold Transformation Algorithm and Anti-Arnold Transformation Algorithm". In *1st IEEE International Conference on Information Science and Engineering*, pages 1164-1167, 2009.
- [25] Preda, Radu Ovidiu. "Self-recovery of unauthentic images using a new digital watermarking approach in the wavelet domain." *Communications (COMM)*, 2014 10th International Conference on. IEEE, 2014.
- [26] EL'ARBI, MAHER, AND CHOKRI BEN AMAR. "Image authentication algorithm with recovery capabilities based on neural networks in the DCT domain." *Image Processing, IET* 8.11 (2014): 619-626.
- [27] Muhammad Sajjad, Khan Muhammad, Sung Wook Baik, Seungmin Rho, Zahoor Jan, Sang-Soo Yeo, Irfan Mehmood, Mobile-cloud assisted framework for selective encryption of medical images with steganography for resource-constrained devices, *Multimedia Tools and Applications*, Volume 76, Issue 3, pp 3519–3536, 2017
- [28] Khan Muhammad, Jamil Ahmad, Naeem Ur Rehman, Zahoor Jan, Muhammad Sajjad, CISSKA-LSB: color image steganography using stego key-directed adaptive LSB substitution method, *Multimedia Tools and Applications*, Volume 76, Issue 6, pp 8597–8626, 2017
- [29] Jamil Ahmad, Khan Muhammad, Zahoor Jan, Exploiting angular profiles signature for shape-based image classification and retrieval, *International Journal of Applied Pattern Recognition*, Volume 3, Issue 3 , 2016. DOI: 10.1504/IJAPR.2016.079761